# Markilux 1700 Retractable Awning





EMAIL: ENQUIRIES@SAMSONAWNINGS.CO.UK

TELEPHONE: (01933) 448844 MON - FRI 8:30AM - 5:30PM

## Fully open. Still magnificent.

#### markilux 1700

Whenever you would like to enjoy life outdoors, the open design of the markilux 1700 will create comfortable shading on your patio or balcony. Its organic design is elegant and timeless, and thanks to the stable torque bar, it opens up the option of connecting up to three awnings together, making it possible to shade large areas without any problem. Enjoy the pleasant atmosphere this much openness brings.



markilux 1700 stretch

Available for narrow recesses and openings, with two crossover folding arms providing greater projection than width.



### Polished chrome fittings

Both the open markilux 1700 and its closed counterpart, the markilux 1710, can be embellished with polished chrome end caps and inserts on request.





### **MX**\_1700



06/20

Open awning

max. 700 × 400 cm

Arm technology

Bionic tendon

Options

polished chrome fittings,

valance,

coupled awning,

stretch




NOMINEE 2014



red<mark>dot</mark> design award winner 2012

# markilux designer awnings

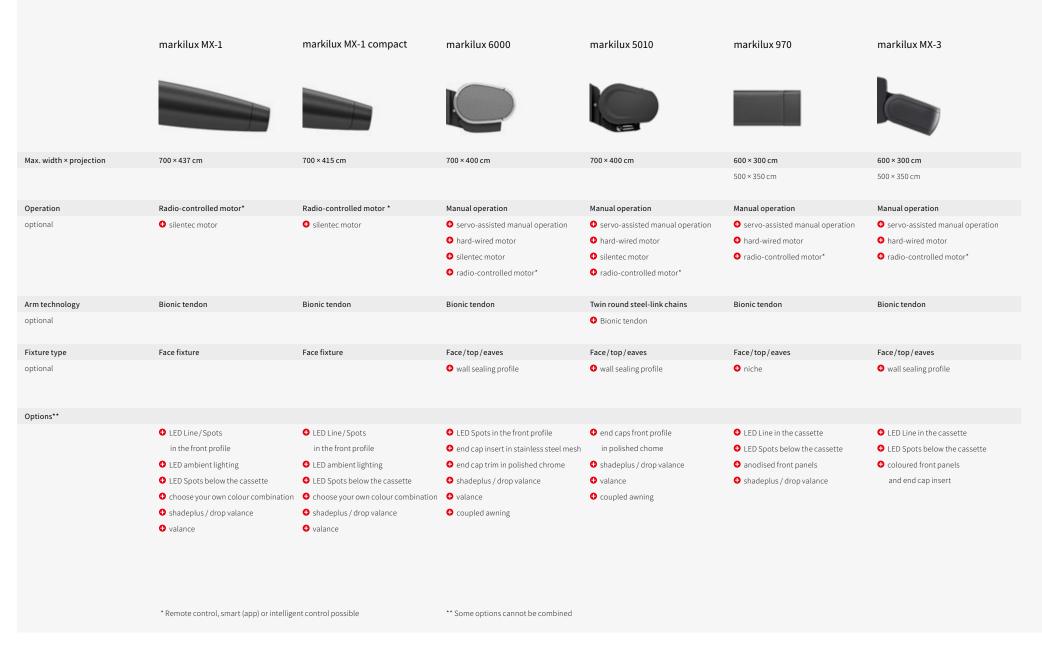



| markilux 990  | markilux 3300  | markilux 1710                     | markilux 1600  | markilux 930                      | markilux 1700                     | markilux 1300                   |  |
|---|--|-----------------------------------|--|-----------------------------------|-----------------------------------|---------------------------------|--|
|   |  |                                   |  |                                   |                                   | 3                               |  |
| 500 × 300 cm  | 700 × 400 cm   | 700 × 350 cm                      | 710 × 400 cm   | 500 × 300 cm                      | 700 × 400 cm                      | 700 × 400 cm                    |  |
|   |  |                                   |  |                                   |                                   |                                 |  |
| Manual operation  | Manual operation                                     | Manual operation                  | Manual operation   | Manual operation                  | Manual operation                  | Manual operation                |  |
| • servo-assisted manual operation   | • servo-assisted manual operation                    | • servo-assisted manual operation | • servo-assisted manual operation  | • servo-assisted manual operation | • servo-assisted manual operation | servo-assisted manual operation |  |
| • hard-wired motor  | • hard-wired motor                                   | • hard-wired motor                | • hard-wired motor   | • hard-wired motor                | • hard-wired motor                | hard-wired motor                |  |
| • radio-controlled motor*   | • silentec motor                                     | • radio-controlled motor*         | • radio-controlled motor*  | • radio-controlled motor*         | • radio-controlled motor*         | • radio-controlled motor*       |  |
|   | • radio-controlled motor*                            |                                   |  |                                   |                                   |                                 |  |
| Twin round steel-link chains  | Bionic tendon  | Bionic tendon                     | Twin round steel-link chains   | Twin round steel-link chains      | Bionic tendon                     | Twin round steel-link chains    |  |
| • Bionic tendon   |  |                                   | • Bionic tendon  |                                   |                                   |                                 |  |
| Face/top/eaves  | Face/top/eaves                                       | Face/top/eaves                    | Face/top/eaves   | Face/top                          | Face/top/eaves                    | Face/top/eaves                  |  |
| • wall sealing profile  | <ul><li>wall sealing profile</li><li>niche</li></ul> | • wall sealing profile            | • wall sealing profile   |                                   |                                   | • aluminium coverboard          |  |
| • end cap insert in polished chrome   | • valance  | • end caps and end cap insert     | • LED Spots in the front profile   | • valance                         | • end caps and end cap insert     | • shadeplus / drop valance      |  |
| • valance   | • coupled awning                                     | in polished chome                 | end caps in polished chrome  |                                   | in polished chome                 | <b>⊕</b> valance                |  |
|   |  | • valance                         | • shadeplus / drop valance   |                                   | • valance                         | • pitch adjustment gear         |  |
|   |  | coupled awning                    | • valance  |                                   | coupled awning                    | • coupled awning                |  |
|   |  | • stretch                         | coupled awning   |                                   | • stretch                         |                                 |  |
|   |  |                                   | • stretch  |                                   |                                   |                                 |  |
| markilux format Wind protection and extra privacy   Page 46 markilux 790 Side screen   Page 48    |  |                                   |  |                                   |                                   |                                 |  |
| Individual unit: max. 300 × 250 cm, can be extended   |  |                                   | Extension: max. 450 cm, height: 90 – 250 cm                                      |                                   |                                   |                                 |  |
|   | io demarcation, fixed to footings, awning s          | ystem element                     | Operation: manual operation; Fixture type: can be fitted to a wall or in a niche |                                   |                                   |                                 |  |
| Options: ♥ triangular solutions, slide, panoramic window  Options: ♥ angled top edge and mobilfix |  |                                   |  |                                   |                                   |                                 |  |

# markilux awning systems

|                         | markilux pergola                           | markilux pergola compact            | markilux planet                    | markilux markant                    | markilux syncra               | markilux construct                  |
|-------------------------|--|-------------------------------------|------------------------------------|-------------------------------------|-------------------------------|-------------------------------------|
|                         |  |                                     |                                    |                                     |                               | Tirk range of the                   |
| Max. width × projection | 600 × 450 cm                               | 450 × 400 cm                        | 600/610 × 300 cm                   | 600 × 600 cm (2 fields)             | Up to 60 m <sup>2</sup>       | Almost unlimited                    |
|                         | 500 × 600 cm                               |                                     | 500/510 × 350 cm                   | 300 × 600 cm (1 field)              | depending on the awning model |                                     |
| Awning system           | pergola                                    | pergola                             | Awning-cum-parasol                 | Textile weather protection          | Awning stand system           | Frame system                        |
|                         | tracfix cover guidance                     | tracfix cover guidance              | with one                           | Free-standing, purist in design,    | with two posts                | modular and flexible                |
|                         | with lateral guide tracks                  | with lateral guide tracks           | markilux designer awning           | on four posts with                  | and one/two                   |                                     |
|                         | on slim posts                              | on slim posts                       | as desired                         | integrated designer awning          | markilux designer awnings     |                                     |
|                         |  |                                     |                                    |                                     | or pergolas as desired        |                                     |
| Operation               | Hard-wired motor                           | Hard-wired motor                    | Depending on the awning model      | Radio-controlled motor*             | Depending on the awning model | Depending on the awning model       |
| optional                | • silentec motor                           | • radio-controlled motor*           |                                    |                                     |                               |                                     |
|                         | • radio-controlled motor*                  |                                     |                                    |                                     |                               |                                     |
| Arm technology          | -  | -                                   | Depending on the awning model      | -                                   | Depending on the awning model | Depending on the awning model       |
|                         |  |                                     |                                    |                                     |                               |                                     |
| Fixture type            | Face/top/eaves                             | Face/top/eaves                      | Free-standing                      | Free-standing                       | Free-standing                 | Free-standing                       |
|                         | • wall sealing profile                     | • wall sealing profile              | on concrete foundations            | on concrete foundations             | on concrete foundations       | on concrete foundations             |
|                         |  |                                     |                                    | or attached to a wall               | or stabilisation boxes        |                                     |
| Options**               |  |                                     | Depending on the awning model      |                                     | Depending on the awning model | Depending on the awning model       |
|                         | ❶ LED Line/LED Spots                       | • LED Line/LED Spots                | • flex (335° pivoting)             | ❶ LED Line/LED Spots                | • uno                         | • vertical roller blinds            |
|                         | • shadeplus / drop valance                 | • shadeplus / drop valance (manual) | • shadeplus / drop valance         | • wall sealing profile              | • flex                        | • wind protection and extra privacy |
|                         | • wind protection and extra privacy        | • wind protection and extra privacy | • base plate covers                | • vertical roller blinds            | • round or square posts       | • panoramic window                  |
|                         | • round or square posts                    | • round or square posts             |                                    | • wind protection and extra privacy | • base plate covers           | • round or square posts             |
|                         | <ul> <li>adjustable posts</li> </ul>       | • adjustable posts                  |                                    | • panoramic window                  | • coupled awning              | • base plate covers                 |
|                         | • stabilisation boxes                      | • stabilisation boxes               |                                    |                                     |                               |                                     |
|                         | • coupled awning                           |                                     |                                    |                                     |                               |                                     |
|                         | * Remote control, smart (app) or intellige | ent control possible                | ** Some options cannot be combined |                                     |                               |                                     |





# Nationwide delivery and installation service



6-8 MEADOW CLOSE **ISE VALLEY INDUSTRIAL ESTATE FINEDON ROAD** WELLINGBOROUGH **NN8 4BH** 

**EMAIL: ENQUIRIES@SAMSONAWNINGS.CO.UK** TELEPHONE: (01933) 448844 MON - FRI 8:30AM - 5:30PM



