

ProMatic garage door operator

Reliable function at an attractive price



ProMatic
As standard with
two black HSE 2 BS
hand transmitters

ProMatic garage door operators feature the same proven Hörmann technology as all Hörmann premium operators. This guarantees reliable function – at an attractive price. Even in a garage without a mains connection, you can enjoy the comfort and convenience of an operator. The ProMatic Akku makes it possible. Easy to transport, it can be recharged in a matter of hours.



Optional inquiry of the door position

You can use the optional HS 5 BS hand transmitter at any time to check that your garage door is closed. This is not available with the ProMatic Akku.



ProMatic Akku

A convenient solution for garages without a power connection. Similar to the recharging of a mobile phone, the battery is simply connected to a power outlet using the supplied charger.



Easy overnight recharging

A practical carrying handle and its light weight make it easy to transport the battery for charging. The solar module makes charging even more convenient.



Solar module (optional)

A practical extension to ProMatic Akku takes over battery charging.

Delivery includes fitting material, 10 m connecting lead and charge controller.
Dimensions: 330 x 580 mm

ProMatic

Pull and push force: 600 N
Peak force: 750 N
Opening speed: max. 14 cm/s
Door width: up to 5000 mm
(max. 11 m² door surface)

ProMatic Akku

For garages without a power connection
With 868 MHz fixed code
(without door position inquiry)
Pull and push force: 350 N
Peak force: 400 N
Opening speed: max. 13 cm/s
Door width: up to 3000 mm
(max. 8 m² door surface)

Battery

Operation period: approx. 40 days*
Charging time: 5 – 10 hours**
Weight: 8.8 kg
Dimensions: 330 x 220 x 115 mm




ProMatic Akku
As standard with
two black HSE 2 BS
hand transmitters.

* Based on an average of 4 door cycles per day and an ambient temperature of 20° Celsius

** Depending on the charging state

The Hörmann operator boom

Security both day and night with automatic locking

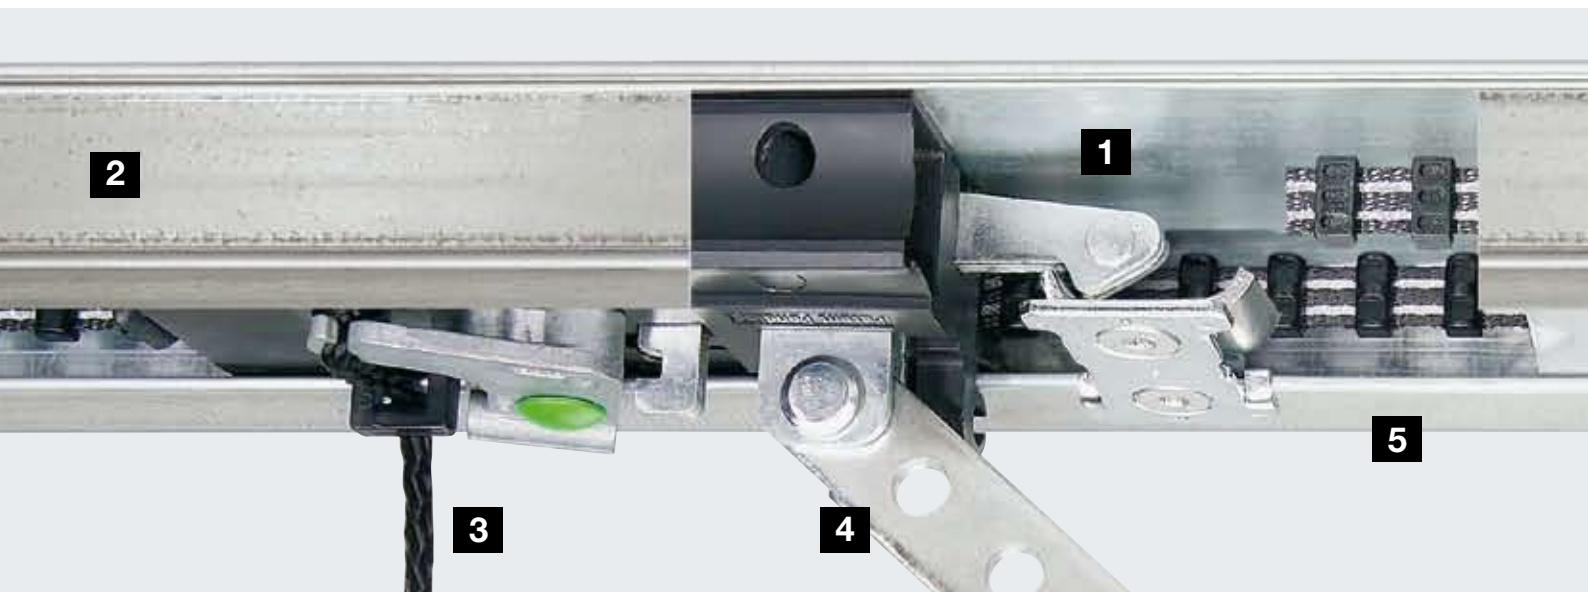

Only from Hörmann

1 Automatic door locking in the operator boom

When the garage door is closed, the anti-lift kit automatically engages in the operator boom's stop, locks immediately and is secured against forced opening. This process is purely mechanical and thus also functions without a power supply!



Take a look at the video at:
www.hormann.co.uk

2 Exceptionally flat boom

An exceptionally flat boom – only 30 mm high – means that operators are easy to fit to any commercially available garage door and are therefore also ideal for retrofitting.

3 Emergency release from inside

To conveniently open the door from the inside in the event of a power failure.

4 Universal fitting bracket

Fits all commercially available up-and-over and sectional doors.

5 Maintenance-free toothed belt

Reinforced with aramid fibres, the Kevlar toothed belt is particularly tear-resistant and quiet-running. It does not require grease or lubricants, providing an important advantage over chain or spindle operators.

6 Automatic belt tension

A strong spring mechanism always tensions the toothed belt automatically, thus ensuring uniform, smooth running.



As standard with all Hörmann garage door operators



6

Compact unit

Hörmann's doors, operators and booms form a compact, permanently connected unit. Additional control units and exposed, movable connecting leads are not necessary.

Simple installation

Hörmann operators can be installed easily and quickly. Operator booms can be fastened to the ceiling individually thanks to variable suspensions. Operators can also be attached directly to the reinforced connection profile on the Hörmann sectional door (up to 3000 mm door width). Suspension from the garage ceiling is not necessary. An additional advantage: just one suspension is sufficient, even for long booms.

Centre installation

Centre installation of the operator rails on the door leaf results in uniform pull forces on the door. No canting, no wear, which is frequently the case with e.g. operators installed on one side.



Special track application for hinged garage doors

Thanks to simple assembly of the optional track application, retrofitting is also very easy.