

# **Robust Secur-Dor**



EMAIL: [ENQUIRIES@SAMSONDOORS.CO.UK](mailto:ENQUIRIES@SAMSONDOORS.CO.UK)  
TELEPHONE: (01933) 274276  
MON - FRI - 8.30AM - 5.30PM

# SECUR-DOR

Intruder and blast  
resistant security doors



## INTRUDER RESISTANT

TESTED TO  
BS EN 1627:2011

CERTIFIED BY  
Warrington Exova  
Certisecure STS 202  
PAS 24



## EXPLOSIVE RESISTANT

(SECUR-DOR SD4)  
BS EN 13124-2:2004  
EXR2





# SECUR-DOR

## Certified Steel Security Doors

**Our Security Doors have been tested to and passed Warrington Exova Certisecure STS 202 and PAS 24 standards.**

Our Security Doors have also been tested to and passed BS EN 1627:2011 and European Security Standard DD ENV 1627:1999.

### > VERSIONS

We offer three versions – each providing increased security (latched or unlatched):

#### SECUR-DOR2

##### Security Door Tested to **STS202 BR2 & PAS24**

protect low to medium risk properties from determined opportunist attempts at forced entry using a variety of hand tools. They are particularly suitable as apartment doors for residential and social housing.

#### SECUR-DOR3

##### Security Door Tested to **STS202 BR3**

Protect medium risk residential or commercial properties from attempts at forced entry, with little regard for noise, using heavy hand tools.

#### SECUR-DOR4

##### Security and Blast Door Tested to **ENV 1627 Level 4**

Protect medium to high risk properties from experienced attempts at forced entry, regardless of noise, using heavy hand and battery tools or explosives.

*\* All of our doors are made to measure!*

### > DOOR LEAF

#### Production Sizes:


All SECUR-DOR doors are custom made. The maximum size varies according to fire rating as shown below for Mild Steel and 316 or 304 Stainless Steel.

<b>Single Doors Latched</b> (Single Swing)	Max Width	mm	1300	1300	1250
	Max Height	mm	2800	2800	2800
<b>Double Doors</b> (Single Swing - Latched or unlatched, equal or unequally split)	Max Width	mm	2700	2700	2600
	Max Height	mm	2800	2800	2800
<b>Thickness:</b>		mm	48	55	48
<b>Material:</b>			1.5mm corrosion resistant Zintec/Aluzinc sheets as standard	2mm corrosion resistant Zintec/Aluzinc sheets as standard	1.5mm corrosion resistant Zintec/Aluzinc sheets as standard
<b>Infill:</b>			Filled with mineral wool and integral steel stiffeners.	Filled with mineral wool and integral steel stiffeners.	Solid timber cored with internal stainless steel steel anti-attack skin
<b>Construction:</b>			Doorblade manufactured from two 1.5mm sheets lockformed together, by bonding two steel skins around a rigid core. A total steel armour thickness of 3 - 4mm.	Doorblade manufactured from two 2mm sheets lockformed together, by bonding two steel skins around a rigid core. A total steel armour thickness of 4mm. Fitted with anti-tamper hinges.	Doorblade manufactured from two 1.5mm sheets lockformed together, by bonding two steel skins around a rigid core. Additionally fitted with a 1.5mm stainless steel sheet to the internal face of the outer skin and a solid timber core. Fitted with a full length continuous hinge. A total steel armour thickness of 4.5mm. Fitted with integral lock box.

### > FINISHES

*\* Did you know we send out touch up kits with every door?*

#### Standard



Polyester Powder Coated from Standard Colour Range

#### Optional




Polyester Powder Coated from Non-Standard Colour Range



Unfinished for site finishing

> DOOR FRAME

		SECUR-DOR2	SECUR-DOR3	SECUR-DOR4
Construction:	Material:	Folded and welded from 1.6mm Zintec/Aluzinc.	Folded and welded from 2mm Zintec/Aluzinc.	Folded and welded from 3mm Zintec/Aluzinc.
	Sub-Frame:	Fully welded, variable sub-frame supplied as standard to accommodate site tolerance of -0/+30mm. The sub-frame providing additional protection to the fixings against jemmys.	Folded and welded from 2mm Zintec/Aluzinc. Fully welded, variable sub-frame supplied as standard to accommodate site tolerance of -0/+30mm. Complete with Anti-Crush plate. The sub-frame providing additional protection to the fixings against jemmys.	Specially modified, variable sub-frame supplied as standard to accommodate site tolerance of -0/+30mm. The sub-frame providing additional protection to the fixings against jemmys.
	Fixings:	Four specially modified Class 13 stainless steel hinges with four security dog bolts for security.	Four Class 13 stainless steel dog bolt hinges recessed and specially modified to prevent pin extraction. Plus two solid ball round dog bolts to increase resistance to prising	Stainless steel dog bolted continuous hinges for additional security.
	Infill:	Mineral wool	Mineral wool	
Profile: (see diagrams below)		A, B, C	A, B, C, D	C, D

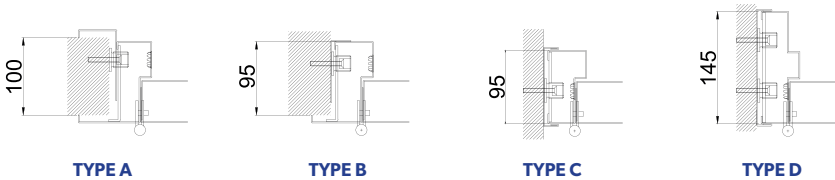


> THRESHOLD

Standard:	15mm rebated (DDA compliant)		✓	✓	✓
Optional:	5mm driveable (DDA compliant)		✓	✗	✗

> VISION PANELS

Only available on SECUR-DOR2 PAS 24

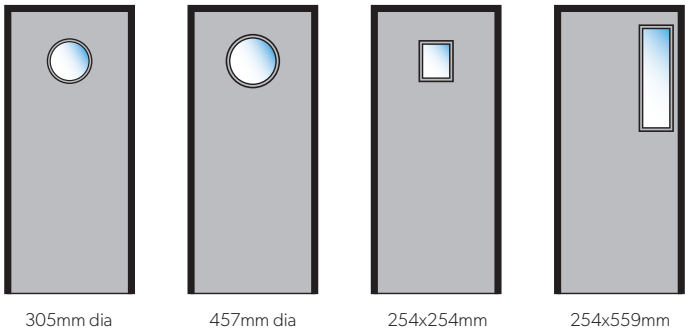

Permitted panel sizes:	Max Width	mm	610
	Max Height	mm	1854
	Max Area	m²	0.4
Standard glazings available: Other configurations and sizes available – please contact the Sales Office.			11.5mm laminated (wired or clear)



## &gt; SECURE LOCKING

**SECUR-DOR2****SECUR-DOR3****SECUR-DOR4****Locking:****PAS 24**

Fitted with high security Deadlock or Sashlock (c/w lever handles or pull handle) & double europrofile cylinder and fitted with TS007 security escutcheons.

**STS202 (BR2)**

Fitted with a minimum of two high security locks;

1 no Securefast C EN grade 7 security sashlock and lever handle, (SA 222 50SS R/7) double europrofile cylinder and fitted with TS007 security escutcheons fitted to the centre door position

1 no Securefast C EN grade 7 security deadlock, (SA21250 SS R/7) double europrofile cylinder and fitted with TS007 security escutcheons fitted to the lower quarter of the door leaf.

**Fire Escape Doors**

Alternatively the doors can be fitted with 3 point heavy duty panic escape hardware to offer means of escape, which is accepted by the Secure by Design scheme.

Fire Escape Doors are fitted with a 1.2mm internal skin to resist drill attack.

Note: Taller doors may require a third, additional, lock.

3 no individual high security locks for enhanced security

High Security triple point high security sashlock, Securefast, with High Security cylinders and anti-jemmy escutcheon protecting against snapping attack. Lock is anti-drill and pattern protected to reduce the risk of key copying. Doors are fitted with Exidor tower bolts.

Alternatively doors can be fitted with three point heavy duty Panic Hardware for Fire Escape but must be fitted with a Locking Box to prevent Drill Attack.

Double doors are fitted with heavy duty tower bolts to inactive leaf.

A centre High Security Sashlock combined with two similar Deadlocks in the upper and lower quarters of the door. All locks fitted with anti-jemmy escutcheon and welded shroud. Locks are anti-drill and pattern protected to reduce risk of key copying. MICO TINDALL and Surelock McGill hardware can also be used. Doors are fitted with Exidor tower bolts.

Alternatively high security multi-point heavy duty panic hardware for fire escapes.

Double doors are fitted with heavy duty tower bolts to inactive leaf..

## &gt; THERMAL VALUES

**Obtainable thermal values with infill as detailed:**

2.4 w/m²k

2.6 w/m²k

2.9 w/m²k

## &gt; APPLICATIONS

**Duty:**

Light commercial and perimeter security.

Protection from a determined attack, with some preparation and a number of tools where the attacker is willing to make some, but not prolonged, noise.

**Note:** All duty recommendations assume the doors are used in conjunction with other comparable levels of security at windows, etc.

The SD2 door can offer up to 120min. fire rating if fitted with appropriate ironmongery

Medium risk residential and commercial properties which may be obscured from view.

Protection from a deliberate forced entry of a well protected property using a wide variety of tools with little regard for noise.

**Note:** All duty recommendations assume the doors are used in conjunction with other comparable levels of security at windows etc.

The SD3 door can offer 120min. fire rating if fitted with appropriate ironmongery.

Heavy duty and vulnerable properties, probably with a prior record of attempts at forced entry.

Protection from experienced attempts at forced entry of commercial properties with no regard for noise.

Further the door is suitable for protection against attempted entry by explosive blasts.

**Note:** All duty recommendations assume the doors are used in conjunction with other comparable levels of security at windows, etc.

## &gt; TESTING

**Security:**

These doors achieve a pass to the following: **PAS24** and **STS202 (BR2)**. Both of which are accepted by Secure by Design.

**BS EN 1627 RC2**

Tests involve a determined attack over a period of 15mins. using tools including screwdriver, 300mm. lever, and hammer.

When fitted with Vision Panels the door can only be offered to PAS24 rating.

The SD2 holds Secure by Design certification.

These doors achieve a pass to the following: **STS202 (BR3)** which is accepted by Secure by Design.

**BS EN 1627 RC3**

Tests involves a determined attack over a period of 20mins. using tools including hand hammer, hand drill, and crowbar.

**Tested to BS EN 1627 RC4**


The test involves a determined attack over a period of 30mins. using a selection of hand and battery tools including club hammer, cordless drill, cold chisel and axe.

**Blast:**

N/A

N/A

SD4 doors have been tested and passed **EXR2 of BS EN 13124-2**, Explosion Resistance standard, with explosive blasts using plastic explosives.

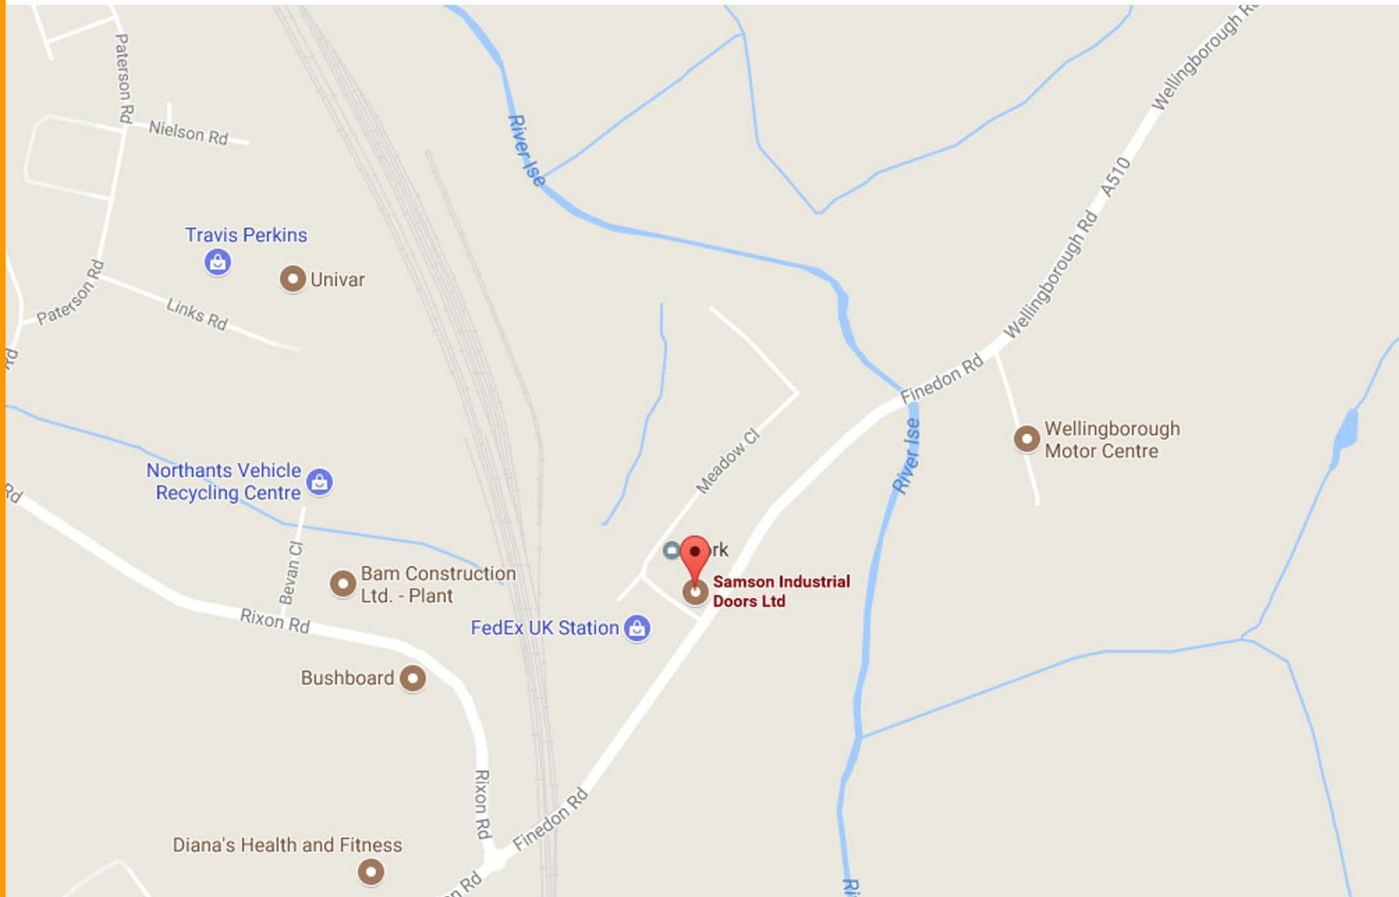

**6-8 MEADOW CLOSE  
ISE VALLEY INDUSTRIAL ESTATE  
FINEDON ROAD  
WELLINGBOROUGH  
NN8 4BH**

**EMAIL: [ENQUIRIES@SAMSONDOORS.CO.UK](mailto:ENQUIRIES@SAMSONDOORS.CO.UK)  
TELEPHONE: (01933) 274276  
MON - FRI - 8.30AM - 5.30PM**