## Samson ThermoTeck XXL Insulated Roller Shutter



EMAIL: ENQUIRIES@SAMSONDOORS.CO.UK
TELEPHONE: (01933) 274276
MON - FRI - 8.30AM - 5.30PM





## Limitless room.

## For easy entry and exit.

Whether for the steel industry, machine building, in hangars, or other applications where oversize dimensions are a must, the new XXL roller shutters provide more leeway. We offer individual doors with widths of up to 18 m (Wind load 1) or up to 15 m (Wind load 2). Double rolling shutter systems with widths of up to 36 m are used when even larger openings are needed. The double rolling shutter doors comprise two doors arranged side-by-side. A round galvanised steel centre support with a width of about 50 cm providing lateral support can be easily pushed to the side when the doors are rolled up. With the special rail system, the unlocked centre post can be simply pushed to the edge by hand. Both doors are opened and exit can take place with minimal manoeuvring. Safety is always assured in the process: The post must be unlocked before it can be moved; and the doors can only be moved if the centre post is locked in place.

## Also available in XXL height

Individual doors are available in heights of up to 12 metres and double rolling shutter systems are available in heights of up to 10 metres. As a result, door surfaces the size of a tennis court can be achieved. Surface areas of up to 280 m² speak for themselves.





Thoroughly developed ideas from design to installation.

www.samsondoors.co.uk 0800 328 6250 12/2017





Use in hangar areas for helicopters.




In the sawmill: Two rolling shutter doors offer sufficient room for the passage of extra wide lumber. They can also be integrated into the control systems of on-site conveyor systems.



Special doors as snack bar shutters for the catering area in a football stadium.



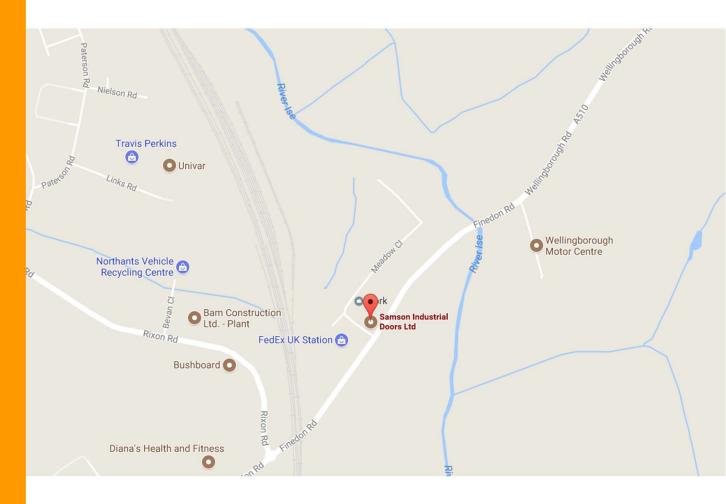

6-8 MEADOW CLOSE
ISE VALLEY INDUSTRIAL ESTATE
FINEDON ROAD
WELLINGBOROUGH
NN8 4BH

EMAIL: ENQUIRIES@SAMSONDOORS.CO.UK TELEPHONE: (01933) 274276

MON - FRI - 8.30AM - 5.30PM

Seme

