

Summer, Sun – MAY

0800 328 6250

MEZZO – Operating Manual



[www.samsondoors.co.uk](http://www.samsondoors.co.uk)



## WARRANTY

**A 24 months warranty** is granted on this umbrella, including all operational parts. Warranty does not cover damage from improper use, strong winds or rust film on spoke joints.



0800 328 6250

# A good choice

By purchasing a MEZZO, you have opted for a MAY side-post umbrella of premium quality.

Our umbrellas are all manufactured and adjusted with high-quality workmanship and special care. Strict final inspection ensures absolute reliability.

For long-lasting pleasure with your MEZZO we advise you to observe the following points...



[www.samsondoors.co.uk](http://www.samsondoors.co.uk)

We are sure your MEZZO will always cut a fine figure.



0800 328 6250


## Correct location of pole and bed


For maximum shade all day long, we recommend positioning the pole as described in the illustration opposite.



**Attention!**  
No warranty for damage caused by strong wind.

**Please note:** Your MEZZO umbrella is not designed for comprehensive protection in severe weather conditions. When strong winds arise, close the umbrella immediately. If located in an exposed area, (upwinds, slope, etc.) additional pedestal weight may be required.

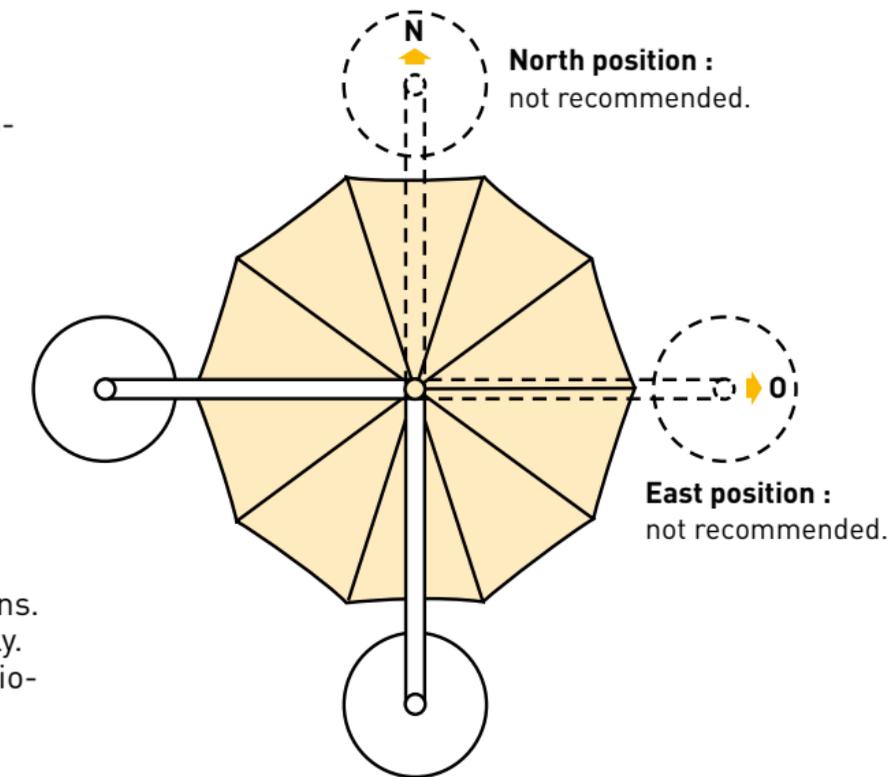

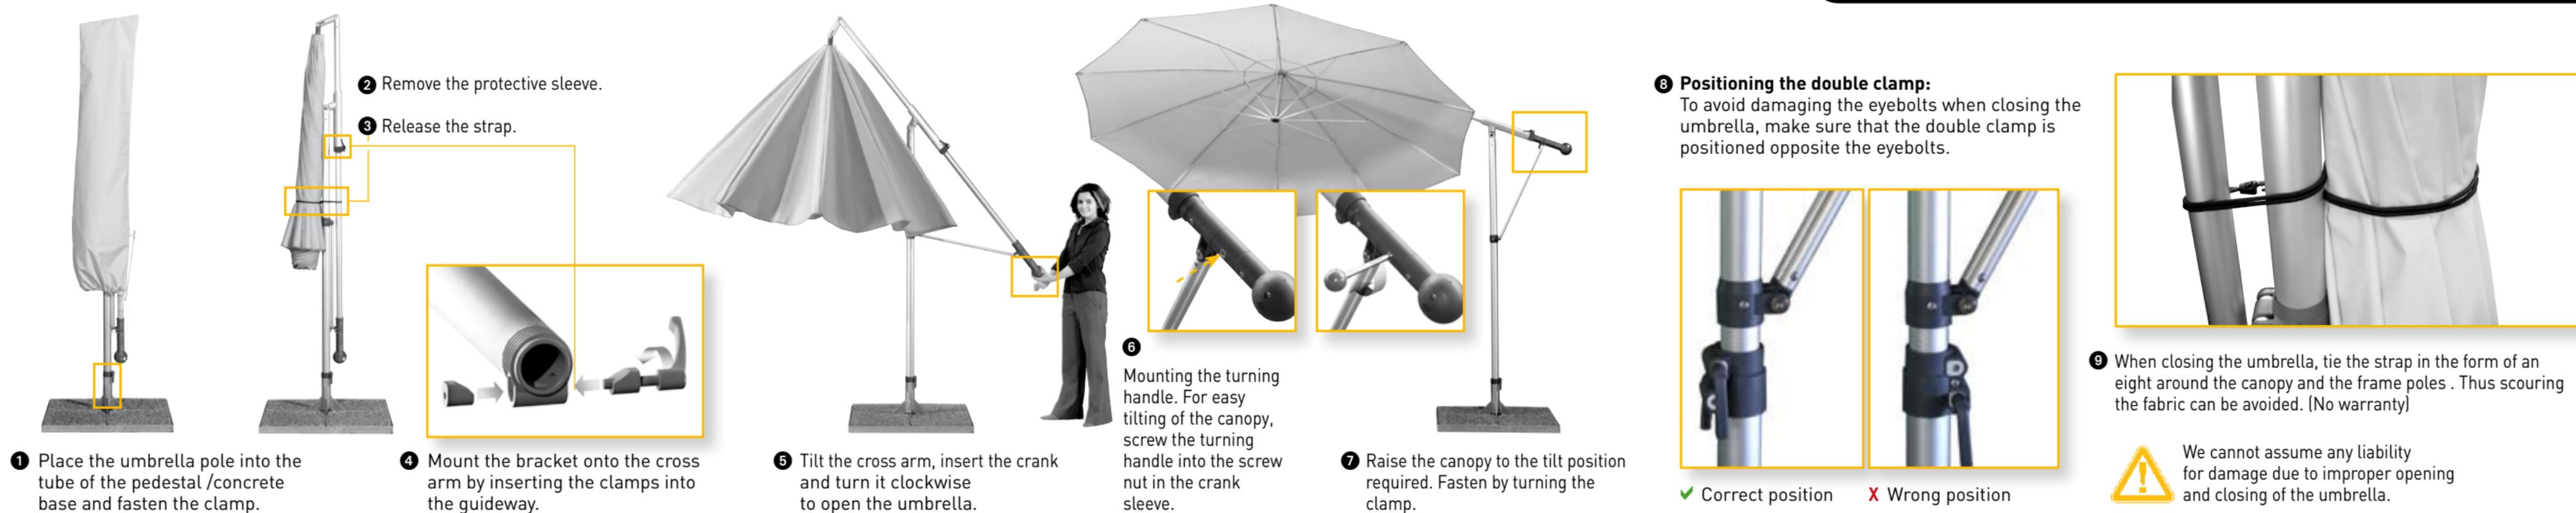

[www.samsondoors.co.uk](http://www.samsondoors.co.uk)

**1 Up to 360° rotation adjustment round support pole:**

Release clamp. Turn the umbrella to the position required. Fasten clamp.

**2 Up to 90° tilt adjustment of the articulated axle:**

Release clamp. Tilt the umbrella to the position of your choice. Fasten clamp.

**3 Up to 360° rotation adjustment of cross arm:**

Release clamp. Use the crank to drive the umbrella into the position required. Fasten clamp.

For easy handling: hold and tilt the canopy with one hand while fastening the clamp with the other.

**4 Height adjustment (35cm) only possible with special version MH:**


Release top clamp. Raise or lower the umbrella to the height required. Fasten clamp.

**5** In case cross arm sticks, a thin coat of silicon may be applied.



0800 328 6250

## Operating the umbrella

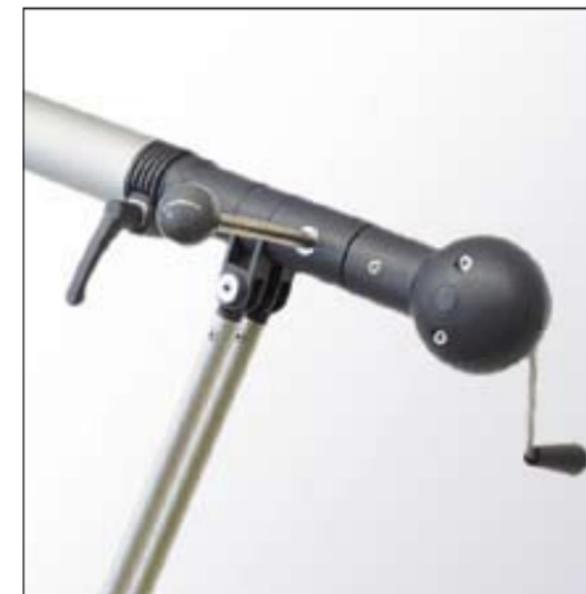

Turning handle for easy tilting of the canopy.



Crank drive for effortless opening and closing of the umbrella.



Double clamp for safe height adjustment.

Ergonomic operating elements make it child's play to handle MEZZO.

[www.samsondoors.co.uk](http://www.samsondoors.co.uk)



### Canopy

All our awning fabrics are made of high-quality materials. They are light-resistant, colourfast and extremely robust. A special finishing process also makes the fabrics water repellent, oil and grease resistant as well as resistant to emissions and pollution. However, as with any textiles, minimal colour deviation, slight pilling or differences in thread thickness are unavoidable. Colour pigments in the thread and impregnation can appear as white stripes in fabric creases.

Accordingly, in our conditions of sale and delivery we have taken into account the so-called "No-fault catalogue" published by the German institution responsible for industrial fabrics (Bundesverband Kunst-

## Maintenance

stoff- und Schwergewebekonfektion e.V. Düsseldorf).

### Cleaning the canopy

Clean canopy with a soft brush or with a high pressure hose (max. 30°C/ 303 K/ 86 °F, max. 30 bar, min. distance 30 cm/12 inch). For persistent dirt, add soap and rinse well. Make sure that afterwards all soap is washed off.



Do not put the protective sleeve on wet umbrella.

### Cleaning the metal parts

Dirt stains on aluminium parts can be removed with a polishing abrasive. As the spokes are made of spring steel, they may

rust slightly. Use a deruster to remove the rust film. All other parts of your MEZZO umbrella are maintenance-free. If spokes get damaged, they can easily be screwed off and replaced individually.

### Winter storage

Make sure the umbrella is completely dry before winter storage. Store the umbrella in a place where mice etc. will not get at it.



**For type MH:** Release both clamps about one turn to avoid too high tension in cold weather.