






Specification



SECEUROGUARD™ 1000 Specification

GENERAL ARRANGEMENT



- 1 Top hung on nylon coated steel bearings
- 2 All galvanised steel construction
- 3 Powder coating in a range of colours
- 4 Fits within or around the reveal
- 5 Multi-point locking from single key - 2 point
- 6 Strong steel lattice with smooth durable finish
- 7 Overlapped locking profiles
- 8 Optional folding bottom track
- 9 Steel riveted lattice assembly system.

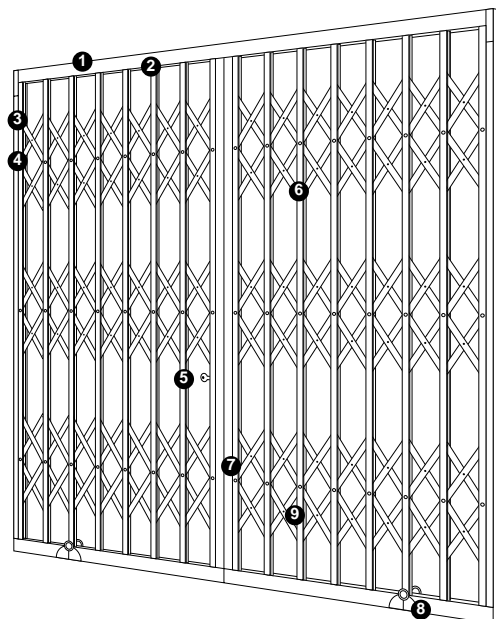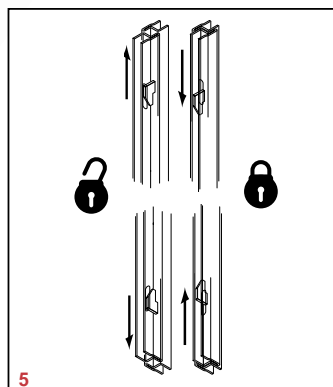

SECEUROGUARD™ 1001 Insurance Approved Specification

GENERAL ARRANGEMENT






- 1 Top hung on nylon coated steel bearings
- 2 All galvanised steel construction
- 3 Powder coating in a range of colours
- 4 Fits within or around the reveal
- 5 4 point locking from a single key with the lock mechanism shielded by a steel plate
- 6 Strong steel lattice with smooth durable finish
- 7 Overlapped locking profiles
- 8 Optional folding bottom track
- 9 The 1001 has a specially designed lattice assembly system utilising high grade steel screws (patented).

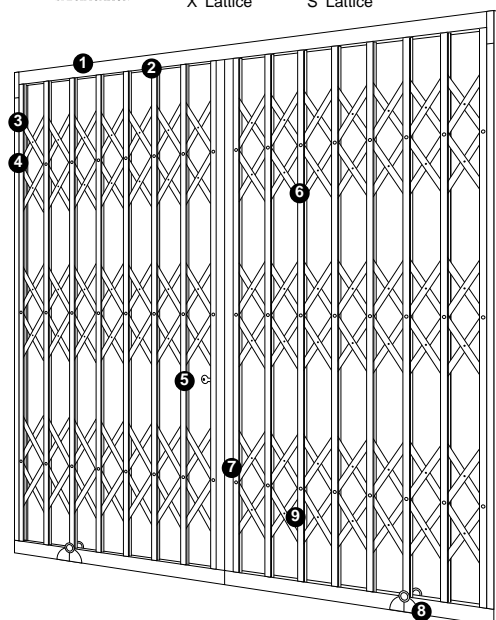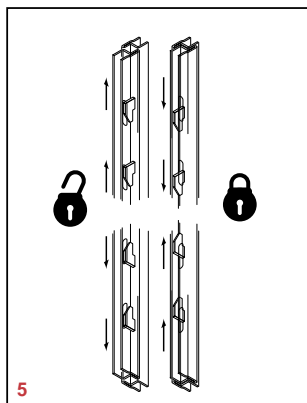

1001 INSTALLATION CRITERIA

The validity of the LPCB certification is contingent upon each security gate being installed in accordance with the requirements of LPS 1175.

- Reveal or face installation
- Min fixing distance from edge of reveal 50mm
- Max fixing distance from any corner 100mm
- Max distance between fixing 400mm
- All fixing heads spoiled:
 - Masonry 2.5" x 12s
 - Wood 4.0" x 12s
 - Steel 1.0" x M8s




Note - All approved gates carry a label detailing the manufacturer, test standard and rating.



HINGE ASIDE OPTION DETAIL SecuroGuard 1000 Only

Maximum size for hinge aside
 1800mm x 2400mm (w x h) single sash
 3600mm x 2400mm (w x h) double sash





Please Note: SecuroGuard 1001 is **NOT** available with the hinge aside option, bottom running option, split top or bottom track or split sashes

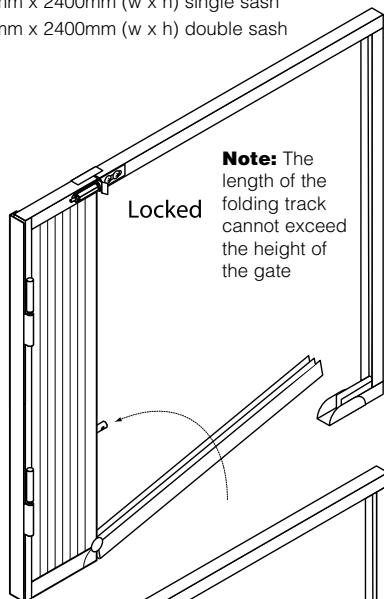

Note: The length of the folding track cannot exceed the height of the gate




Note: Folding tracks with a length of 600mm or more are supplied with a retaining pin as standard - see below for details

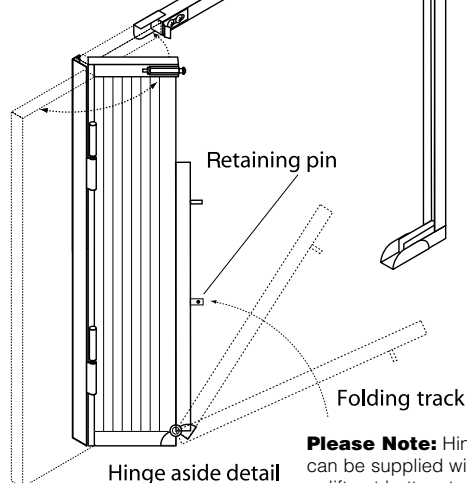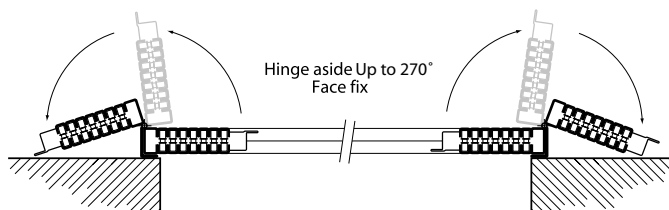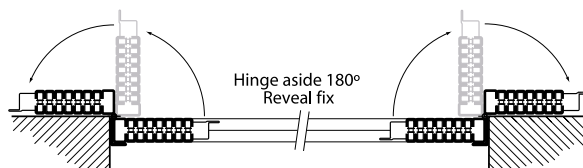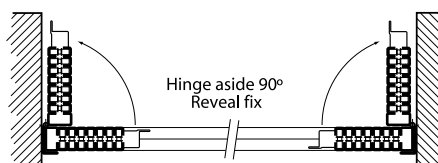

Please Note: Hinge aside gates can be supplied with either a folding or lift out bottom track but cannot be supplied with a fixed bottom track.


FOLDING TRACK AND REMOVABLE TRACK OPTION DETAILS

Single Sash Folding Track Option

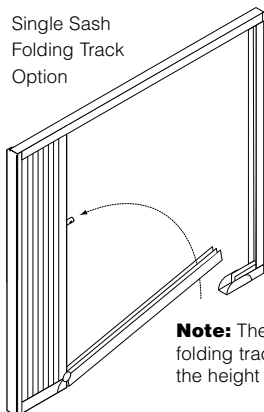


Note: The length of the folding track cannot exceed the height of the gate

Note: Folding tracks with a length of 600mm or more are supplied with a retaining pin as standard. This is located between 488mm and 568mm from the ground regardless of track length. **The retaining pin projects 60mm beyond the lock post.**



Bi-parting Sash Folding Track Option

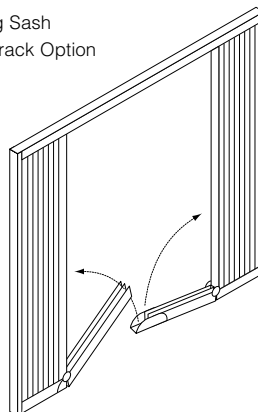

Lift Out Bottom Track Option

