


Ordering Information

Style

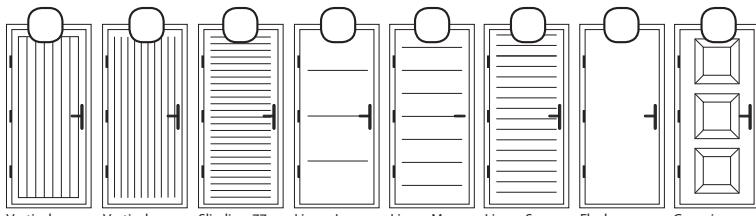

Vertical Tongue & Groove Vertical Boarded Slimline-77 Linear L Linear M Linear S Flush Georgian

Size (refer to notes top right)

Panel

Insulated
Single Skin

Overall frame width (FW)

Overall frame height (FH)

Mounting

Opening

Between Brickwork Outward

Behind Brickwork* Inward

Back fixing kit When viewed from outside the garage

*A back fixing kit will be required.

Hinge Side

L R When viewed from outside the garage

Threshold

Standard 15mm low profile

Optional 30mm ramped

Colour

White Rosewood (foil)

Golden Oak (foil)** Black (foil)

Anthracite (foil)

Custom colour, RAL or B.S. number:

**Georgian style not available in Golden Oak

Options

Rain Guard (top of door)

ERA™ anti-bump cylinder

Hoppe™ door closer

Handles (black standard)

Black (standard)

Silver Satin

Smoked Chrome

White

Windows

Stainless Steel: Round Square Glass: Clear Obscure



Specification & Survey Form

Customer Name:

Address:

Postcode:

Tel Mobile:

Tel Office:

P.O. / Order Reference

Email:


Sizing Notes

IMPORTANT: NO FITTING CLEARANCE IS INCLUDED IN SIZES


Fixing between brickwork:
Recommended ordering size is the minimum structural opening width minus 15mm and height minus 10mm.

Fixing behind brickwork:
15mm must be allowed at the sides and head for outward opening doors. See figure 2.

Dimensions

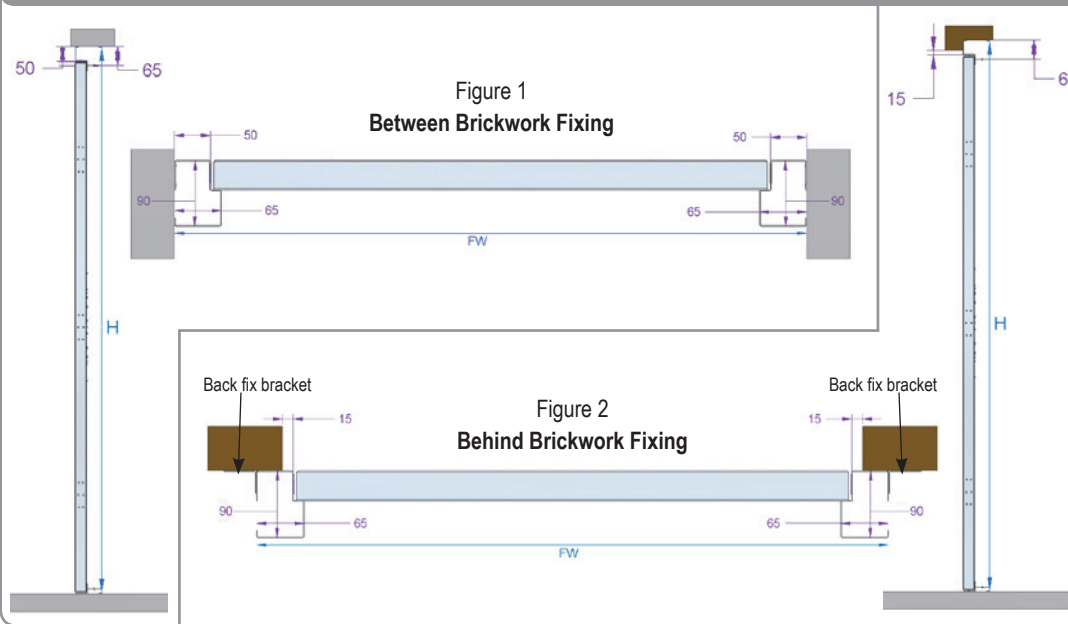

Terminology & Clearances

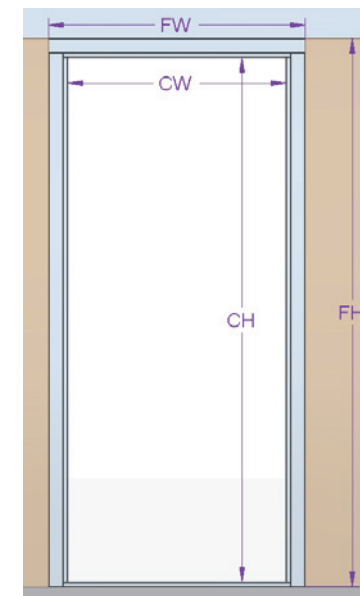

- FW** Overall frame width
- CW** Clear passage width = FW - 127mm
- FH** Overall frame height
- CH** Clear passage height = FH - 80mm
For standard 15mm low profile threshold
- CH** Clear passage height = FH - 90mm
For optional 30mm ramped threshold

Thresholds

