



Sizes & Technical Specifications



Terms and conditions apply to the warranty on DuraPass doors, please ask for full details.



Doors are available in standard and custom sizes

Standard Overall Frame Widths

890mm
990mm
1140mm

Any custom width from
790mm - 1140mm

Standard Overall Frame Heights


1865mm
2090mm
2190mm
2390mm

Any custom height from
1850mm - 2390mm

Standard Colours: White, Golden Oak*, Rosewood *Not available on Georgian style

Custom Colours: Select range, Heritage range, Any RAL or BS Colour

Overall Frame Dimensions

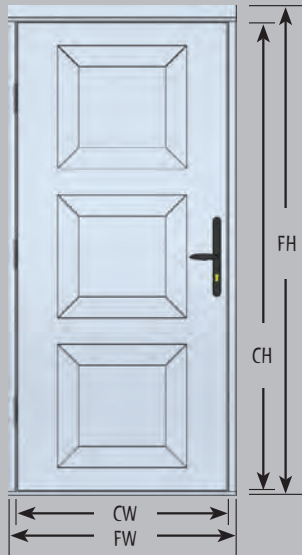

FW Frame width

CW Clear passage width = $FW - 127\text{mm}$

FH Frame height

CH Clear passage height = $FH - 80\text{mm}$ For standard 15mm low profile threshold

CH Clear passage height = $FH - 90\text{mm}$ For optional 30mm ramped threshold

To order specify:

Ordering size: No fitting clearance allowed. Garage Door Systems recommends allowing 10mm in width and height when fitting between brickwork.

Handing: Hinged on the left or right as viewed from the outside.

Opening: Outward or inward as viewed from the outside.

Threshold: Standard 15mm low-profile threshold or optional 30mm ramped threshold.


Standard white and foil doors are supplied with a protective film that must be removed within thirty days.

Example:


For a 1000mm x 2100mm structural opening, order your door as 990mm x 2090mm.

Please see Garage Door Systems Survey/Order form for full details, diagrams and additional fitting options.

Thresholds

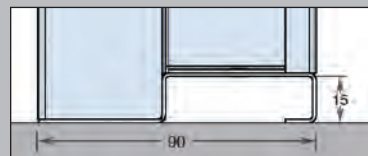

Standard 15mm low profile threshold

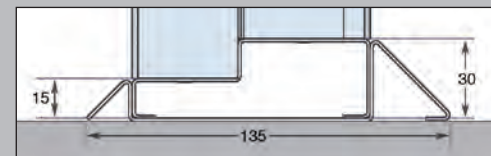

Optional 30mm threshold with ramped adjustable baseplate

Fitting note: To minimise the ingress of rain run-off between the foot of the door leaf and the door threshold, consideration must be given the floor surface to which the door is fitted, ensuring that water is able to drain freely away. This particularly important on inward opening doors.