


Lakeland

Awnings Fabrics

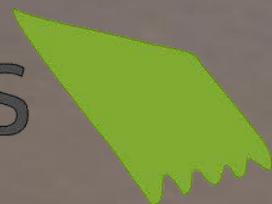

Solids

G604



g _{TOT}	TS	TV	UPF
0,19	26	24	15

G042



g _{TOT}	TS	TV	UPF
0,19	24	23	25

R060



g _{TOT}	TS	TV	UPF
0,12	8	5	50+

G143




g _{TOT}	TS	TV	UPF
0,19	24	22	25

G038



g _{TOT}	TS	TV	UPF
0,12	12	6	50+

G316

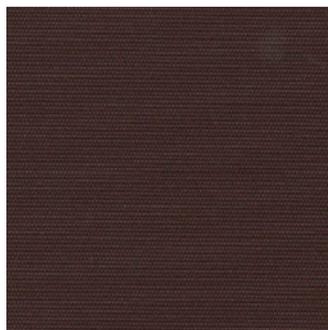


g _{TOT}	TS	TV	UPF
0,10	4		50+

G481



g _{TOT}	TS	TV	UPF
0,08	7	4	50+

G829

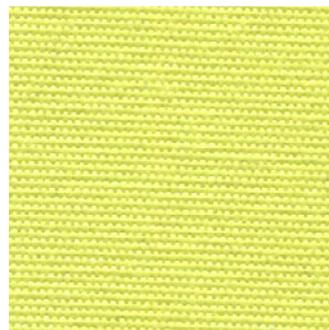

g _{TOT}	TS	TV	UPF
0,15	20	18	50+

G013




g _{TOT}	TS	TV	UPF
0,15	19	13	50+

G209



g _{TOT}	TS	TV	UPF
0,11	5	1	50+

G211

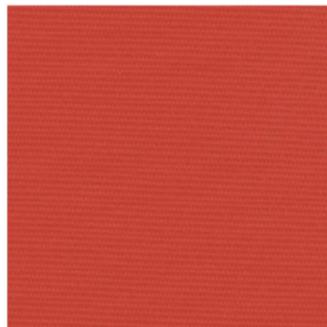

g _{TOT}	TS	TV	UPF
0,13	16	2	50+

G101



g _{TOT}	TS	TV	UPF
0,10	5	1	50+

Solids

G051



g_{TOT}	TS	TV	UPF
0,09	2		50+

R022



g_{TOT}	TS	TV	UPF
0,10	3		50+

G018




g_{TOT}	TS	TV	UPF
0,09	8		50+

G235



g_{TOT}	TS	TV	UPF
0,10	6		50+

G066

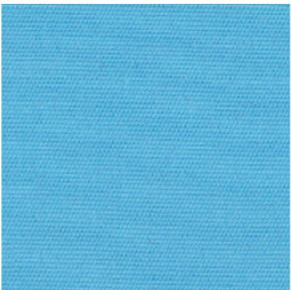

g_{TOT}	TS	TV	UPF
0,15	13	8	50+

G297




g_{TOT}	TS	TV	UPF
0,16	15	12	50+

G245



g_{TOT}	TS	TV	UPF
0,11	3		50+

Z647

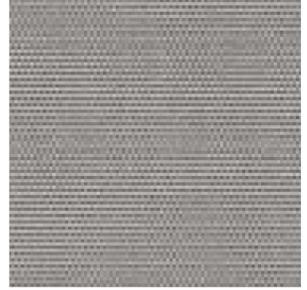


g_{TOT}	TS	TV	UPF
0,12	9	6	50+

G170



g_{TOT}	TS	TV	UPF
0,09	1	1	50+

G327

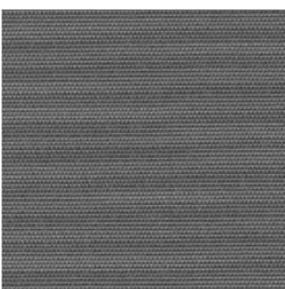

g_{TOT}	TS	TV	UPF
0,09	3		50+


G488




g_{TOT}	TS	TV	UPF
0,10	4	2	50+

IRISUN® ACRYLIC TEXTILES


Textures

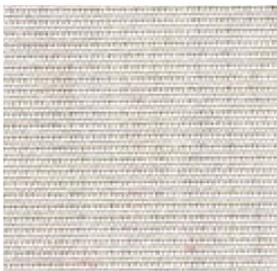G469

g_{TOT} TS TV UPF
0,11 8 3 50+

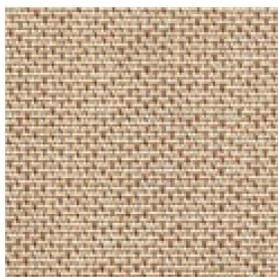G226

g_{TOT} TS TV UPF
0,15 12 8 50+

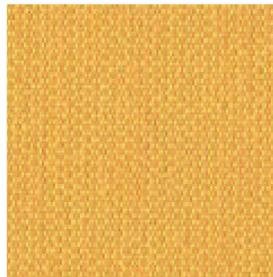G083

g_{TOT} TS TV UPF
0,18 18 14 50+

G364

g_{TOT} TS TV UPF
0,12 8 5 50+

G267


g_{TOT} TS TV UPF
0,17 16 5 50+

G583


g_{TOT} TS TV UPF
0,11 5 50+

G636

g_{TOT} TS TV UPF
0,12 9 6 50+

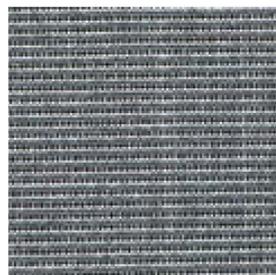G467

g_{TOT} TS TV UPF
0,09 7 3 50+

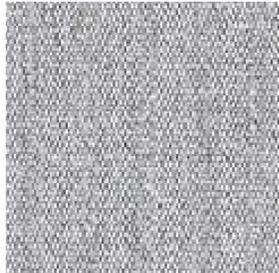G365


g_{TOT} TS TV UPF
0,12 14 13 50+

G674

g_{TOT} TS TV UPF
0,09 4 50+

G702

g_{TOT} TS TV UPF
0,11 4 3 50+

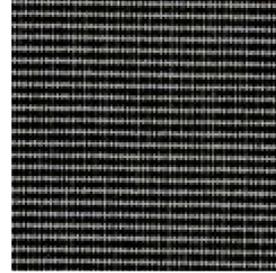G582


g_{TOT} TS TV UPF
0,08 2 50+

G602

g_{TOT} TS TV UPF
0,09 3 1 50+


Stripes

G729

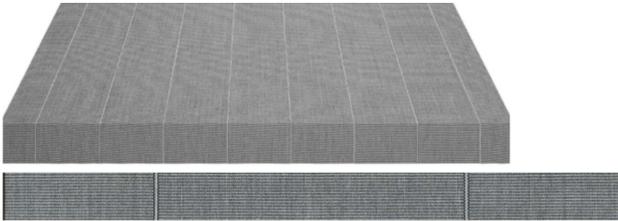


g_{TOT}	TS	TV	UPF
0,08	7	4	50+

G721

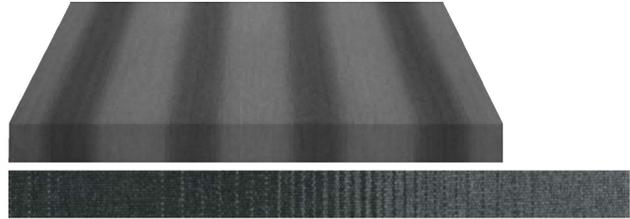


g_{TOT}	TS	TV	UPF
0,08	6	2	50+

G787

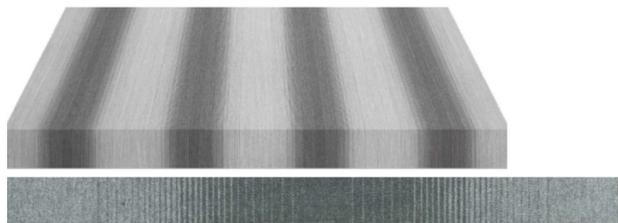

g_{TOT}	TS	TV	UPF
0,09	9	4	50+

G117

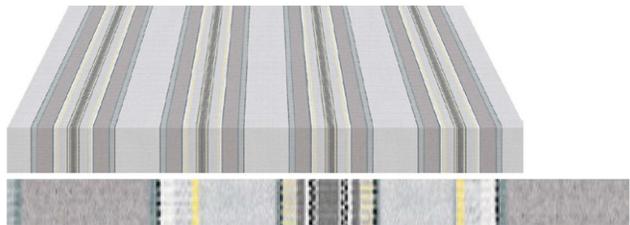


g_{TOT}	TS	TV	UPF
0,14	20	17	50+

R541




g_{TOT}	TS	TV	UPF
0,17	16	14	50+

G307

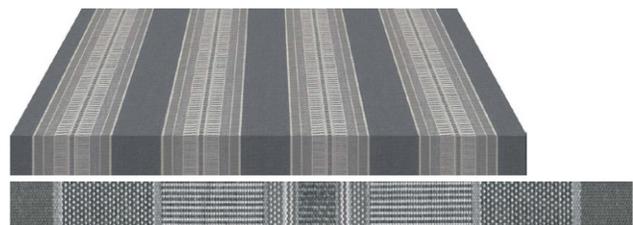


g_{TOT}	TS	TV	UPF
0,16	15	12	50+

G634

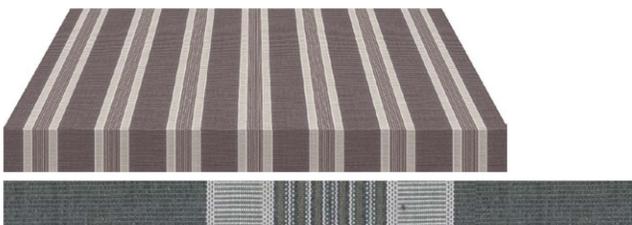

g_{TOT}	TS	TV	UPF
0,17	17	14	50+

G756

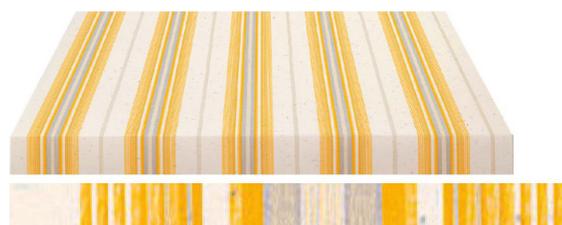

g_{TOT}	TS	TV	UPF
0,16	23	22	50+

G347

g_{TOT} TS TV UPF
0,14 20 17 50+

G428

g_{TOT} TS TV UPF
0,14 20 16 50+

G770

g_{TOT} TS TV UPF
0,16 23 19 50+

G432

g_{TOT} TS TV UPF
0,13 17 14 50+

G435

g_{TOT} TS TV UPF
0,11 13 9 50+

G270


g_{TOT} TS TV UPF
0,12 16 14 50+

G811

g_{TOT} TS TV UPF
0,14 19 16 50+

G424


g_{TOT} TS TV UPF
0,12 16 14 50+

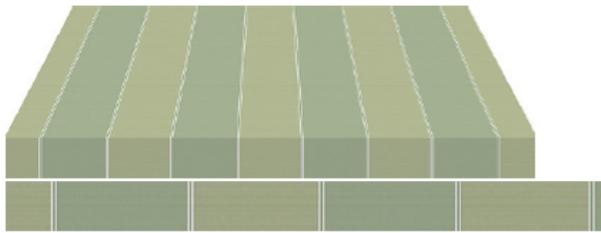R197

g_{TOT}	TS	TV	UPF
0,12	13	8	50+

R228

g_{TOT}	TS	TV	UPF
0,14	20	17	50+

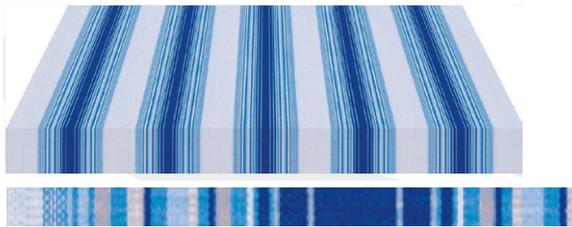R498

g_{TOT}	TS	TV	UPF
0,11	14	11	50+

G632

g_{TOT}	TS	TV	UPF
0,17	16	13	50+

IRISUN® ACRYLIC TEXTILES

Specification

Thickness	0,55 mm
Weight (ISO 2286-2)	290 g/m ²
Roll width	120 cm



FADE RESISTANT



WEATHER RESISTANT



STAIN RESISTANT



MOLD RESISTANT



BREATHABLE

AC SOLUTION
DYED
100% ACRYLIC

DURACLEAN[®]
OUTDOOR TREATMENT

**EASY
CARE**

Oeko-TEX[®]
STANDARD 100
CERTIFIED

REACH

**10
YEARS**

Composition	100% solution dyed acrylic
Finishing	Water repellent
Treatment	Mold resistant Stain resistant
Biocides	OIT
Yarn	PC 2/34 Nm 2/34 Nm
Construction	30 yarn/cm 15 yarn/cm
Roll Length	60m
Breaking Strength	140 daN/5cm 90 daN/5cm
Tear Strength	3,5 daN 2,5 daN
Water Column	350mm
Spray Test (ISO 24920)	5/5
Oil repellency	5
UV Colour Fastness	7-8/8

CARE AND CLEANING

Remove heavy dirt with running water. Use a soft cloth or brush and avoid abrasive facilities and strong rubbing. Cleaning with IRISUN® APCO FAST CLEANER is recommended.

Do not use aggressive detergents, alkaline or acid substances, oxidizers like hypochlorite or hydrogen peroxide.

For mould removal, white vinegar is advised and then rinse with abundant water. Allow the textile to dry, before rolling up. It is advisable to treat the material periodically with a protective product (IRISUN® APCO PROTECTANT), strengthening the fabric and renovating its water-repellent properties.

APPLICATIONS

Textiles are recommended for retractable awnings, canopies and café barriers.

Also suitable for marine applications.