


Xpanda Shed Bar Fitting Guidelines

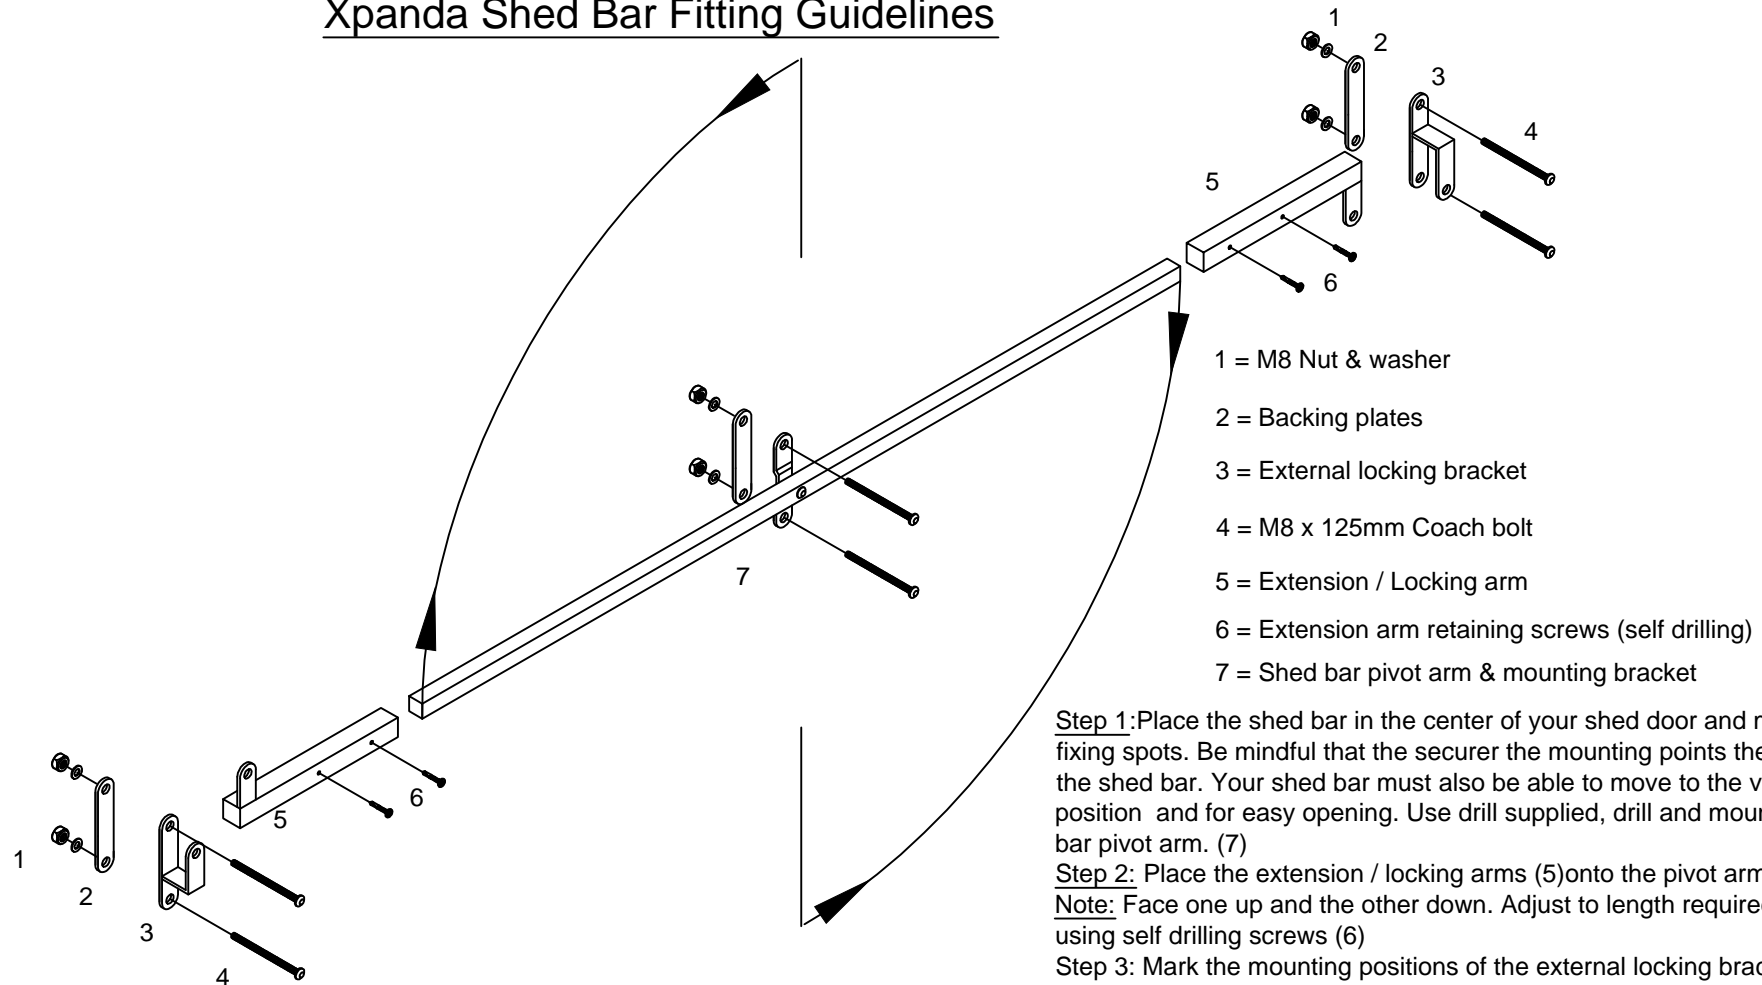

1 = M8 Nut & washer

2 = Backing plates

3 = External locking bracket

4 = M8 x 125mm Coach bolt

5 = Extension / Locking arm

6 = Extension arm retaining screws (self drilling)

7 = Shed bar pivot arm & mounting bracket

Step 1: Place the shed bar in the center of your shed door and mark your fixing spots. Be mindful that the securer the mounting points the stronger the shed bar. Your shed bar must also be able to move to the vertical position and for easy opening. Use drill supplied, drill and mount the shed bar pivot arm. (7)

Step 2: Place the extension / locking arms (5) onto the pivot arm as shown.

Note: Face one up and the other down. Adjust to length required and fix using self drilling screws (6)

Step 3: Mark the mounting positions of the external locking brackets(3)

Note: Face one up and the other down. Make sure locking holes align

Secure all brackets using the backing plates supplied.

Lock securely with circle locks supplied.