(0800) 328 6250

PRODUCT GUIDE

CI/SfB (31.5) (31.5) February 2006


1



SECURITY SHUTTERS, RETRACTABLE SECURITY GATES & REMOVABLE WINDOW BARS



Product Guide

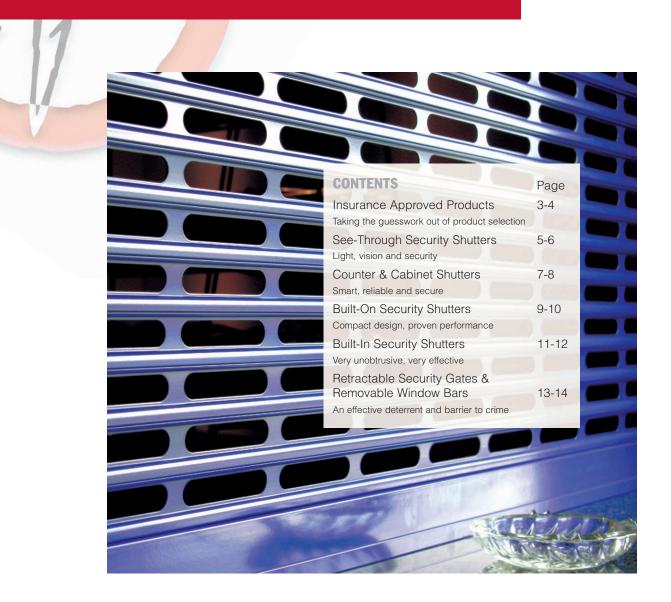

MEETING YOUR SECURITY NEEDS

Today, more than ever before, we need physical security at home and work to protect against vandalism, burglary or just for privacy and peace of mind. Increasingly, existing buildings are having security upgraded and new buildings are being designed to incorporate security.

Security shutters, retractable gates and removable window bars meet many of these threats to property and person. The emphasis behind our range of shutter and gate designs is on integration into your building and way of life; unobtrusive, attractive and easy to use. Not bolted on as an afterthought but designed, manufactured and installed to complement the building and ensure they are effective and secure in daily use.

This brochure introduces you to the diversity and flexibility of the Seceuro range. Modular in their design, security shutter and gate systems can easily be adapted to suit many different applications and size requirements. Further detailed application and technical guides are also available.

MAKING SECURITY EFFORTLESS

Shutters that are frequently operated are greatly enhanced in use by automation. SWS employs the Somfy range of motors and controls. Somfy is widely regarded as the worldwide market leader in tubular motors and control systems for the automation of security shutters.

Founded in 1960 in Cluses at the foot of Mont Blanc, Somfy established its UK operation in 1989. Somfy has consistently delivered well designed, reliable automation systems.

Single motor systems through to group command activated motors for multiple shutters, are all backed with Somfy's comprehensive warranty for added peace of mind.

All powered shutter systems are CE marked in accordance with the Supply of Machinery (Safety) Regulations 1992.



EUROPEAN PRODUCT STANDARDS

CE Th cc di 13

The SECEURO range of products are compliant with the latest European product directives and standards including BSEN 13241-1 applicable from the 1st May 2005.



MAXIMUM/MINIMUM DIMENSIONS. WEIGHTS. **APPLICATIONS, FINISHES & OPERATION**

Shutters coil with the concave side facing the barrel. The fixing position of the shutter box determines the visible external face of the shutter slats. 7500 slats are <u>also</u> able to coil in reverse (convex side facing the barrel) allowing the preferred visible external face to be selected irrespective of shutter fixing position. Note:Reverse coiling increases the coil size

At a glance



& SWITC

RAL Single Anal Spring Gananised Sounder Coat Option assisted Silver Annui. Bar Servery Kosk Cabinet White Satin Gawanised Provision Brown / Crean Geared Belt - this is a low security of the se SWIVEL BELT ** THIS IS I DW SECURD OPION Manual Spinghand assisted Commercial Domestic Retail **IPCB** 0 OLICE PREFERR Conv Concave Max / Min Overall Size (wxh) Max Area in sqm Concave Convex **Applications** Standard Curtain Finish Operation/max.area m² Face Material Type / Curtain weight Vin Width 900mm Vax 3000mm x 4000mm 12 SECEUR SHIELD 3801 Insurance Approved 5 Max Area 12som Security Shutters uded Aluminium / 8kgm² Manual only Min 500mm x 1000mm SECEUR GUARD 1001 Max 6000mm x 3000mm Max Area 18sqm Insurance Approved **Retractable Security Gates** Steel / 19kgm 4.5 3.8 2.3 12 9 SECEUR[®]VISION[™] 3800 Min Width 500mm Vax 3000mm x 5000mm Vax Area 12sqm See-Through Shutters Punched/Glazed 45% Vision xtruded Aluminium / 6.5kgm² Min Width 500mm Max 3000mm x 5000mm 12 9 4.5 3.8 2.3 SECEUR VISION" 3800 See-Through Shutters Max Area 12sqm Extruded Aluminium / 6.5kgm² Perforated 17% Vision 15 10 Min Width 1000mm SECEUR®VISION" 7500 Max 6000mm x 3400mm 7 Max Area 15sqm See-Through Shutters Perforated 25% Vision 2 swa Steel / 8kam Min Width 900mm 20 8 SECEUR[®]VISION[™] 8000 lax 6000mm x 5000mm See-Through Shutters Max Area 20som Punched & Glazed 62% Vision xtruded Aluminium / 7kgm² SECEUR VISION 9000 Vin Width 900mm 13 8 Max 5000mm x 4000mm See-Through Roller Grille Max Area 13sqm 55/69% Vision xtruded Aluminium / 7kgm 8 6 6.5 5.5 3.3 Min Width 500mm SECEUR[®]SCREEN[®] 1500 Max 3400mm x 4000mm Max Area 8sqm **Built-On Security Shutters** nsulated Rolled Aluminium / 4.5kgm² 7 2 Min Width 500mm 12 3.5 3 SECEUR[®]SHIELD[®] 3800 1ax 4000mm x 5000mm **Built-On Security Shutters** Max Area 12som ktruded Aluminium / 8kgm² SECEUR SHIELD 6000 Vin Width 900mm 20 8 Max 6000mm x 5000mm Max Area 20sqm **Built-On Security Shutters** Extruded Aluminium / 9kami 15 8 SECEUR[®]SHIELD[™] 7500 Min Width 1000mm Max 6000mm x 3400mm **Built-On Security Shutters** Max Area 15sqm 2swg Steel / 10kgm Vin Width 900mm 16 12 SECEUR®SHIELD 7700 Max 5400mm x 4000mm **Built-On Security Shutters** Max Area 16sqm Insulated Rolled Aluminium / 5kgm SECEUR®GUARD" 1000 Manual only Min 500mm x 500mm Max 6000mm x 3500mm Max Area 21sqm **Retractable Security Gates** Steel / 19kgm² SECEUR[®]BAR[®] Min 250mm x 200mm Max 3000mm x 2100mm Manual only Removable Window Bars Max Area 6.3sgm Steel / 5kgm²

1 Sizes quoted may not be available with some operation modes (see the data for each operation type for confirmation) and may alter depending upon product application, wind loading or whether installed as a secondary (such as over a window) or sole (such as a garage) closure for an opening.

2 9.25kgm² with glazing.

2 52-SNIT with grazing.
3 SeceuroShield 7700 slat standard colour option is light beige in place of cream, and is available in a range of 7 colours. Woodgrain finish also available as an option for SeceuroShield 7700 & SeceuroScreen 1500.
4 150mm link spacing 6Kg/sqm with 69% vision as standard or optional 75mm link spacing 7Kg/sqm with 55% vision (shown).

5 The validity of the LPCB certification is contingent upon each security shutter and gate being installed in accordance with the requirements of LPS 1175.

6 SeceuroBar standard colour white only (no brown as standard)

7 Please note the maximum sizes quoted for SeceuroVision 7500 and SeceuroShield 7500 are applicable to the continental style shutter with aluminium head box and guide rails. These products are also available with traditional galvanised steel channels and head box. The maximum sizes for the traditional style are as follows: maximum width 6400mm, maximum height 4700mm and maximum area 20sgm.

NOTE: The standard colours are for the curtain only. Guides, shutter box and the bottom rail are supplied in white or dark brown as standard with the exception of the SeceuroVision 9000 which comes with a silver anodised bottom rail. Colour matching to the curtain is an optional extra - please request clarification for the shutter chosen

Insurance Approved Products

SECEUR SHIELD

3801 Insurance Approved Security Shutters



TAKING THE GUESSWORK OUT OF PRODUCT EVALUATION

How can you know which products are truly resistant to physical attack? Appearance may suggest security, but can you be sure that a device does not contain a design flaw that will allow rapid access to the ingenious burglar? Specifiers, end-users, the police and insurers are increasingly demanding physical security that carries an independent stamp of compliance and quality assurance. The Loss Prevention Certification Board (LPCB), the UK's leading independent certification body, operates a product approval scheme to Loss Prevention Standard 1175 (LPS 1175)

What "tested and approved to LPS 1175" means -

Approval & certification is based on the testing of the products performance, and the manufacturer's quality management systems being in accordance with ISO 9000. Installation procedures are also defined to a high standard, ensuring the product is not weakened by poor installation. These specialist products should only be attached to structurally sound openings such as masonry, brick, steel or timber, moreover the type and frequency of fixings required is very precise. LPS 1175 is the only meaningful benchmark for gauging actual resistance in the face of a determined attack.

Passing the test regime is a tough and lengthy process -SWS's SeceuroGuard 1001 & SeceuroShield 3801 are both approved to:

LPS 1175 security rating classification 1

Take the guesswork out of product selection - use tested and approved products from SWS.



SeceuroGuard 1001 undergoing a simulated attack test

THE POLICE PREFERRED SPECIFICATION



As a further reinforcement of the products performance, the SeceuroShield 3801 security shutter and the SeceuroGuard 1001 retractable security gate have successfully undergone Secured by Design evaluation and are able to display the "Police Preferred Specification" mark. Secured by Design identifies technical standards and evaluations which test the competence of security products and their resistance to criminal attack. The tests and evaluations are carried out by UKAS approved test houses.

POLICE PREFERRED SPECIFICATION

SECEUROSHIELD 3801

Unlike other certificated shutters, SeceuroShield 3801 (tested and approved to LPS 1175-1) uses a 38mm double-walled extruded aluminium slat, which coils very tightly into a range of compact boxes (165mm - 250mm), minimising their visual impact. This is often a requirement for commercial and domestic installations where aesthetic considerations are paramount. Although supplied in either white or brown as standard, they can be powder coated to reflect corporate colours if required.

- Versatile Fits internally or externally in either the window reveal or around the opening
- High quality finish Supplied in high quality white or brown powder coated finish as standard. Optional colours available - ask for selector chart





1001 Insurance Approved Retractable Security Gates



SeceuroShield 3801 Insurance Approved Security Shutters - commercial installation.

- Secure Locking is provided automatically from the motor and manually operated bottom rail shoot locks or bullet locks to the side guides
- Compact Housings from 165mm 250mm dependent on shutter height
- Ease of Use Somfy Tubular motors and control systems provide electric operation as standard (ask for details on motor control options)



The guide channel engages the shutter curtain for excellent security



PROPERTY PROTECTION SYSTEMS

AUTOMATION All electrically operated shutters are:





SeceuroShield 3801 Insurance Approved Security Shutters - shown here fixed behind the reveal.





IN DETAIL



SECEUROSHIELD 3801 38mm deep profiled twin wall extruded aluminium slat.



SECEUROGUARD 1001 High grade steel construction in cross lattice as standard and 'S' lattice as an option Suitable for internal installation.





Folding bottom track for clear access available as an optional extra.



SeceuroGuard 1001 Security Gates - commercial protection.

SECEUROGUARD 1001

The SeceuroGuard Retractable Gate System combines a classic appearance with effective protection, ideal for home or workplace. The high security 1001 is tested and approved to LPS 1175-1. The system can be easily fitted to the face or reveal of a window or door aperture and can be specified in a single or double-sash configuration. Where a clear walk through is required SeceuroGuard's bottom track can, as an optional extra, be made to fold up.

- Versatile Fits internally in either the window reveal or around the opening in either single or double-sash configuration
- Ease of Use Smooth top running operation with an optional extra of a fold up bottom track to leave doorways unobstructed
- Secure Multi-point locking operating from a single key
- High quality finish Supplied in high quality white powder coated finish as standard. Optional colours available from stock:

White Brilliant White Magnolia Mushroom Beige Yellow Orange Pale Green Green Moss Green Fir Green Pale Brown Brown Dark Brown Poppy Red Traffic Red Dark Red Pale Blue	Satin Satin Satin Satin Gloss Gloss Gloss Satin	RAL 9010 RAL 9016 RAL 1015 BS 06 C 33 RAL 1001 RAL 1018 RAL 1028 RAL 6021 RAL 6016 BS 14 C 39 RAL 6005 RAL 6009 RAL 8070 RAL 8070 RAL 8070 RAL 8070 RAL 8070 RAL 8070 RAL 8070 RAL 8022 BS 04 E 53 RAL 3020 RAL 3011 RAL 5015	Blue Royal Blue Dark Blue Dark Blue Off White Pale Grey Pale Grey Grey Grey Grey Dark Grey Black
---	---	--	---

Satin Satin Satin Satin Satin Satin Satin Satin Satin Gloss Satin	RAL 5009 RAL 5002 RAL 5013 RAL 5013 RAL 7047 BS 18 B 17 RAL 7035 BS 00 A 09 RAL 9006 BS 632 RAL 7015 RAL 9005
---	--

See-Through Security Shutters

SECEUR[®] VISION[™]

3800, 8000, 9000 & 7500 See Through Shutters & Grilles

LIGHT, VISION AND SECURITY

Balancing the demands of security and display with a solution which meets concerns about crime yet still presents an 'open for window shopping' appearance is the strength of see-through security shutters.

Demanded by planners, or an opportunity for generating trade - vision is promoted with a range of designs suited to almost every application. Retail shop fronts, commercial premises and offices seeking a less oppressive look to security have four profiles to choose from. High specification domestic applications are also favouring the appealing mix of light and security. All shutters are able to mix solid and vision sections to optimise performance. Back lighting of the shutters combined with darker curtain colours greatly improves the perceived level of vision by virtue of the higher contrast between internal and external light levels.

Polycarbonate glazing is available with some designs to provide increased security.



SeceuroVision 3800, punched (top) and perforated slat shown together for a comparison of vision levels. Inset - the same installation showing the high level of light transmission.

SECEUROVISION 3800 PUNCHED / PERFORATED

Lightweight and compact, the SeceuroVision 3800 is suited to medium security applications.

- Strong extruded aluminium profile
- Delivers up to 45% vision (punched) / 17% vision (perforated)
- Polycarbonate glazing option
- Medium security office / commercial / retail applications
- Spans widths up to 3000mm
- Available as in-line pattern only
- Can be powder coated special colours if required

- Can be mixed with Seceuroshield 3800 where partial vision is required
- Very compact shutter box



SeceuroVision 8000, retail security, maximum vision - the new generation of Roller Shutter.

SECEUROVISION 8000

Retail security delivered with style. Spring assisted manual operation or effortless electric operation completes an ideal retail solution.


- Strong extruded aluminium profile
- Delivers up to 62% Vision
- Polycarbonate glazing option gives external weatherproofing
- Medium security retail / office / commercial applications
- Spans widths up to 6000mm
- Can be powder coated special colours if required
- Can be mixed with solid profiles where higher security or only partial vision is required




NEEEEEEEEEEE



SeceuroVision 9000 - very high light transmission, excellent for commercial protection.









SECEUROVISION 3800 38mm deep profiled single wall extruded aluminium slat Punched or perforated. Clear polycarbonate insert option available. Suitable for external or internal installation.



SECEUROVISION 8000 Built on shutters with 77mm deep profiled single wall extruded aluminium slat. Clear polycarbonate insert option available (shown). Suitable for external or internal installation.



SECEUROVISION 9000 Built on shutters with 100mm deep extruded aluminium bars and links. In-line and brickbond option patterns. Suitable for internal installation only.



SECEUROVISION 7500 Built on shutters with 75mm deep profiled steel slat. Suitable for external or internal installation.

AUTOMATION All electrically operated shutters are



SECEUROVISION 9000

The new generation of roller grille - very tight coiling and alternative link patterns and spacing, gives outstanding light transmission.

- Internal use
- Strong extruded aluminium roller grille
- Delivers up to 69% vision
- Very compact coil diameter
- Medium security retail / office / commercial applications
- Spans up to 5000mm (subject to appropriate application)
- Can be powder coated special colours if required
- 150mm or optional 75mm vertical link spacing
- Corporate logos can also be included
- Solid slats can be added to further enhance security

SECEUROVISION 7500

A variant on the traditional shutter - the same robust performance but with the addition of vision.

- Strong single skin galvanised steel profile
- Delivers up to 25% Vision (when back lit)
- Medium security office / commercial / industrial applications
- Spans widths up to 6000mm
- Can be powder coated any RAL / BS colour
- Can be mixed with solid SeceuroShield 7500 when only partial vision is required
- Will reverse coil if required (will increase coil size)
- Manufactured with aluminium head box and guides for higher grade applications and easier installation, also available with traditional galvanised steel channels and head box

SeceuroVision 7500 - the strong scrolled profile of the perforated steel slat provides good light transmission.



Counter & Cabinet Shutters

1500 Shutters

SECEUR[®]SCREEN[®] SECEUR[®]SHIELD[®] 3800 & 7700 Shutters

SECEUR[™] VISION[™] 3800 & 9000 Shutters & Roller Grilles

SMART, RELIABLE & SECURE


The effective protection of high value stock within premises is essential. The quality of today's interiors is complemented by the Seceuro range of shutters and roller grilles. Subtly sculpted slat profiles, excellent finishes, vision when required and an all round quality appearance ensure security is provided sympathetically.

To be effective security must, of course, be used - each system is designed to operate quickly and easily either manually or at the touch of a button.

There are products suited to differing environments and security levels, all however, are designed to be very compact. Tight coiling of the shutters means housings are small and do not require large headroom for the shutter box, with wide spans possible within the range, wider if intermediate fixed or removable guide rails are employed.



SeceuroScreen 1500, heat and sound insulation, light easy operation. Shown vented

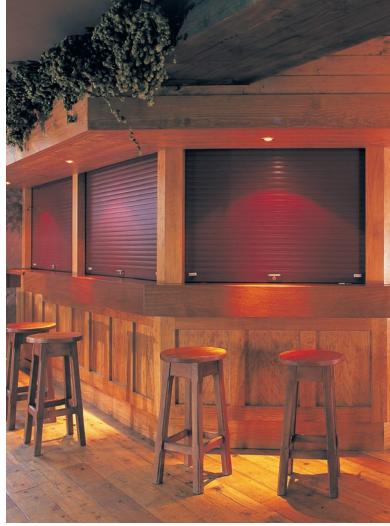

SeceuroShield 3800, tough, secure, yet sympathetic to interior design.

SECEUROSCREEN 1500

Lightweight and compact, the SeceuroScreen 1500 is a cfc free foam filled aluminium slat, offering good strength, insulation and sound deadening.

- CFC Free foam filled rolled aluminium curtain profile
- Low to medium security applications
- Spans widths up to 3400mm
- Effective heat and sound insulation
- Also used for shading and light control
- Lightweight therefore ideal for manual operation

Vented slat option

SECEUROSHIELD 3800

Manufactured from exceptionally strong extruded aluminium

- Strong extruded aluminium curtain profile
- Medium security applications
- Spans widths up to 4000mm
- Can be powder coated in special colours if required
- Can be mixed with SeceuroVision 3800 where partial vision is required
- Very compact shutter box
- Available for use with high security guide rails

SECEUROVISION 3800

Attractive punched slat design is a stylish compliment to contemporary interiors.

- Strong extruded aluminium profile
- Delivers up to 45% Vision
 - Polycarbonate glazing option
 - Medium security applications
 - Spans widths up to 3000mm
- Available as in-line pattern only
- Can be powder coated special colours if required Can be mixed with SeceuroShield 3800 when
- partial vision is required Available as in-line pattern (No brickbond option)
- Very compact shutter box



IN DETAIL

SECEUROSCREEN 1500 40mm deep double wall foam filled rolled aluminium slat. Suitable for external or internal installation. Spring and lock operated shutters are supplied non-vented as standard, all other operations are supplied vented as standard but are also available non-vented.



SECEUROSHIELD 3800 38mm deep profiled double wall extruded aluminium slat. Suitable for external or internal installation.



SECEUROVISION 3800 38mm deep profiled single wall extruded aluminium slat. Punched or perforated. Clear polycarbonate insert option available. Suitable for external or internal installation



SECEUROSHIELD 7700 77mm deep profiled double wall foam filled extruded aluminium slat. Suited to external or internal installation




SECEUROVISION 9000 Built on shutters with 100mm deep extruded aluminium bars and links. In-line and brickbond option patterns. Suitable for internal installation only.

AUTOMATION All electrically operated shutters are









SeceuroShield 3800 & 7700 - perfect for internal or external kiosks - 7700 shown here.



SeceuroVision 9000, high vision levels with very compact coiling.





SeceuroVision 3800, very light in use with good strength and vision.

SECEUROSHIELD 7700

A strong, insulated high performance rolled aluminium profile.

- CFC Free foam filled rolled aluminium profile
- Medium security for commercial, industrial and retail premises
- Spans widths up to 5400mm with effective heat and sound insulation
- Can be mixed with SeceuroVision 8000 when partial vision is required
- The curtain material is available in up to eight stock colours

SECEUROVISION 9000

The new generation of roller grille - very tight coiling and a number of alternative link patterns gives outstanding light transmission

- Strong extruded aluminium roller grille
- Delivers up to 69% vision
- Very compact coil diameter
- Medium security applications
- Spans up to 5000mm
- Can be powder coated special colours if required
- 150mm or optional 75mm vertical link spacing
- Corporate logos can also be included
- Solid slats can be added to further enhance security

Built-on Security Shutters

SECEUR[®]SCREEN[™] 1500 Built On Shutters

SECEUR SHIELD 3800, 6000, 7500 & 7700 Built On Shutters

COMPACT DESIGN, PROVEN PERFORMANCE

The SWS UK Security Shutter range has been developed to provide an architecturally acceptable answer to the growing need for vandalism and burglary protection on domestic and commercial property.

The uniquely neat finish of security window shutters is particularly evident when they are built-on to an existing building with compact aluminium boxes, styled to minimise their visual impact. The slimline finish even makes internal fitting of window shutters a frequent choice. Our continuous programme of product development has produced a compact shutter of exceptional strength for small to medium size apertures. Other benefits include heat and sound insulation, shading, blackout and complete privacy

Countrywide installations include windows and doors on city centre, suburban and rural homes, offices, factories, sports centres, medical premises, schools, community centres, computer rooms and golf clubs. In short, any building where security is a concern. Unlike many other designs, all SWS's solid aluminium profiles are double walled to provide higher security.




SeceuroShield 3800, small shutter housings are unobtrusive in a domestic setting.

SECEUROSCREEN 1500

Lightweight and compact, the SeceuroScreen 1500 uses CFC free foam filled aluminium slats, offering insulation and sound deadening. The compact design makes this shutters suitable for installing within the reveal, particularly popular in domestic applications

- CFC Free foam filled rolled aluminium curtain profile with venting option for shading.
- Low to medium security applications
- Spans widths up to 3400mm
- Effective heat and sound insulation
- Used for shading and light control
- Lightweight therefore ideal for manual operation



SECEUROSHIELD 3800

A profile for domestic to commercial applications.

- Strong extruded aluminium
- For higher security domestic, medium security office/commercial use
- Spans widths up to 4000mm
- Can be mixed with SeceuroVision 3800 for partial vision
- Very compact shutter box with an option for high security guide rails

SECEUROSHIELD 6000

SeceuroShield 3800, high performance profile and very compact rolling - makes application broad

applications.

- coated special colours

A higher security profile for domestic to commercial

- Very strong extruded aluminium profile
 - Higher security applications on commercial / retail premises
- Spans widths up to 6000mm and can be powder

www.samsondoors.co.uk



AUTOMATION All electrically operated shutters are:





SeceuroShield 3800 - shown protecting a vulnerable access door.



updated with colour powder coating.

SeceuroShield 7500, the classic roller shutter design



WIND LOADING

As of May 1st 2005, to comply with the Construction Products Directive, all shutters which are manufactured for installation over door ways must be tested by a notified test body for their wind loading capability, as per BS EN 12424 and 12444. For doors fitted on to an external façade they must reach a minimum of Class 2. During testing both sides of the curtain must be tested.

Summary of wind loading classification:

PRODUCT	CONDITIONS	CLASSIFICATION
SeceuroShield 3800	H30 guides, up to 4m wide	2
SeceuroShield 3800	H30 guides, up to 3.5m wide	3
SeceuroVision 3800	H30 guides, up to 3m wide	2
SeceuroShield 3800	H40/S guides, up to 4m wide	3
SeceuroShield 6000	UPH250 guides, up to 5m wide	3
SeceuroShield 6000	UPH250 guides, up to 6m wide	2
SeceuroShield 7500	UPH250 guides, up to 5m wide	3
SeceuroShield 7500	UPH250 guides, up to 6m wide	2
SeceuroShield 7500	50mm guide, up to 6m wide	2
SeceuroShield 7500	65mm guide, up to 3m wide	4
SeceuroShield 7500	65mm guide, up to 5m wide	3
SeceuroShield 7500	65mm guide, up to 6m wide	2
SeceuroShield 7500	Wind lock guide, up to 6m wide	5
SeceuroShield 7700	Up to 4.8m wide	3
SeceuroShield 7700	Up to 5.4 wide	2
SeceuroShield 8000	Punched & glazed, up to 6m wide	2

WIND LOADING	PRESSURE	WIND SPEED		BEAUFORT SC	ALE
CLASSIFICATION	(Pa)	(mph)	No.	DESCRIPTION	CONDITIONS
2	Above 460	59	10	Storm	Trees uprooted, considerable damage
3	Above 700	73	11	Violent Storm	Wide spread damage
4	Above 1000	88	12	Hurricane	Wide spread damage

IN DETAIL



SECEUROSCREEN 1500 40mm deep profiled double wall foam filled rolled aluminium slat. Suitable for external or internal installation. Spring and lock operated shutters are supplied non-vented as standard, all other operations are supplied vented as standard but are also available non-vented.



SECEUROSHIELD 3800 38mm deep profiled twin wall extruded aluminium slat. Suitable for external or internal installation.



SECEUROSHIELD 6000 55mm deep profiled double wall extruded aluminium slat. Suited to external or internal installation.



SECEUROSHIELD 7500 Built on shutters with 75mm scroll profiled steel slat. Suitable for external or internal installation.



SECEUROSHIELD 7700 77mm deep profiled double wall foam filled extruded aluminium slat. Suited to external or internal installation.

SECEUROSHIELD 7500

The classic steel roller shutter. The scrolled slat profile is a familiar sight, now updated with a quality powder coated finish.

- Strong single skin galvanised steel profile
- Medium security office / commercial / industrial applications
- Spans widths up to 6000mm
- Can be powder coated any RAL / BS colour
- Will reverse coil if required
- Manufactured with aluminium head box and guides for higher grade applications and easier installation, also available with traditional galvanised steel channels and head box

SECEUROSHIELD 7700

A strong, insulated high performance rolled aluminium profile.

- CFC Free foam filled rolled aluminium profile
- Medium security for commercial, industrial and retail premises
- Spans widths up to 5400mm with effective heat and sound insulation
- Can be mixed with SeceuroVision 8000 when partial vision is required
- The curtain material is available in up to eight stock colours

Built-in Security Shutters

SECEUR@SCREEN SECEUR@SHIELD 1500 Built In Shutters

3800 Built In Shutters

VERY UNOBTRUSIVE - VERY EFFECTIVE

Security window shutters have been developed to provide an architecturally compatible answer to the growing need for vandalism and burglary protection on domestic and commercial property. The unobtrusive design also helps in meeting the demands of many of the more stringent planning authorities

Built-in shutters give all the benefits of easily operated security at night, but by day disappear leaving the building attractive and welcoming. Building the shutter box and guide rails into the wall during construction or major refurbishment achieves a neat finish and more importantly, high levels of security. Window shutters are easy to operate from inside, manually or electrically. Where desirable punched or perforated slats can be added to provide varying levels of vision and light.

Countrywide installations include windows and doors on city centre, suburban and rural homes, offices, factories, sports centres, medical premises, schools, community centres, computer rooms and golf clubs. In short, any new building where security is a concern from the outset.



SeceuroScreen 1500, low to medium security applications

SECEUROSCREEN 1500

Lightweight and compact, the SeceuroScreen 1500 has CFC free foam filled aluminium slat, offering insulation and sound deadening.

- CFC Free foam filled aluminium slat, offering insulation and sound deadening
- Low to medium security applications
- Spans widths up to 3000mm
- Effective heat and sound insulation
- Used for shading and light control
- Lightweight therefore ideal for manual operation
- Very compact insulated PVC shutter box



SeceuroShield 3800, powder coated to match the schools windows.

SECEUROSHIELD 3800

The slimline profile of the extruded aluminium slat is double walled giving exceptional strength yet tight coiling for a small shutter box.

- Strong extruded aluminium curtain profile
- Higher security domestic applications
- Medium security office / commercial applications
- Spans widths up to 3000mm
- Can be powder coated special colours if required
- Can be mixed with SeceuroVision 3800 when partial vision is required
- Very compact insulated PVC shutter box



SeceuroScreen 1500 showing the light slit option.



Built-in means just that - the shutter is pre-fitted to the window frame and sits beneath the lintel.



IN DETAIL



SECEUROSCREEN 1500 40mm deep profiled double wall foam filled rolled aluminium slat. Spring and lock operated shutters are supplied non-vented as standard, all other operations are supplied vented as standard but are also available non-vented.



SECEUROSHIELD 3800 38mm deep profiled twin wall extruded aluminium slat. Also shown to the right are the perforated / punched profiles which can be mixed with the solid for light and vision.



SECEUROVISION 3800 38mm deep profiled single wall extruded aluminium slat. Punched or perforated. Clear polycarbonate insert option available.

AUTOMATION All electrically operated shutters are:





SeceuroShield 3800, protecting commercial premises.





A motorised shutter under test after factory fitting of the shutter to the window frame. Curtains are usually installed on site after the window is installed.

SeceuroShield 3800, protecting school premises.

Retractable Security Gates & Removable Bars



SECEUR[™] BAR[™]

1000 Retractable Security Gates Removable Window Bars

AN EFFECTIVE BARRIER AND DETERRENT TO CRIME

The SeceuroGuard Retractable Security Gate system is a stylish solution for protecting windows and doors. Available in two versions, SeceuroGuard 1001 - tested and approved to LPS1175 Security Rating Classification 1 (See pages 3/4) and SeceuroGuard 1000 - the standard design. Both offer highly effective protection and progressively enhanced levels of security.

The award-winning SeceuroBar system features anti-cut steel bars which are securely locked into position to protect vulnerable window openings, but can be released from the inside to allow total vision or maintenance of windows.

Suitable for installation in a horizontal or vertical format, SeceuroBar is finished to a high standard and delivers security which is quick and easy to install, yet highly effective in a range of locations.

A higher security fixed bar system is also available for locations where removal is not a requirement. Alternatively SeceuroGuard can be manufactured in a non retractable format.



SeceuroGuard 1000, retail security, maximum vision.

SECEUROGUARD 1000

Elegant good looks with a heart of steel - the SeceuroGuard Retractable Security Gate System combines a classic appearance with the highest level of protection, ideal for your home or workplace.

Designed to keep intruders out while letting maximum light in, they are perfect for patio doors and French windows and any other vulnerable ground floor doors or windows.

When not in use these retractable gates are surprisingly unobtrusive. Fitted to the door or window surround, they can disappear neatly behind curtains and a pelmet can be used to conceal the top track.

SeceuroGuard retractable gates are exceptionally safe and easy to handle with a smooth, quiet operation. They hang from a top track with a guide track at the base which can be supplied as an optional extra to quickly fold away when not required.





SeceuroGuard 1000, exceptional light levels.

The opportunity to fold up the bottom guide track from the opening (an optional extra) leaves domestic patio doors, doorways and shop entrances free from obstruction.

Because they are fully retractable, each sash can be stacked neatly in the open position away from the door or window openings when not required, and may be hinged to swing away from the opening at 90°,180° and up to 270° to provide a completely clear opening as an optional extra.

Installed inside a shop window, retractable gates deliver an exceptionally strong yet aesthetically appealing barrier against intruders, which allows merchandise to be displayed safely, 24 hours a day. They can also be effective positioned at the rear of the window display, creating an attractive backdrop whilst protecting the shop's interior.









SECEURO BAR Anti-cut steel tube 19mm diameter with angled profile locating and locking sections Suitable for internal installation



SECEUROGUARD 1000

High grade steel construction in cross lattice as standard and 'S' lattice as an option















SeceuroGuard 1000, shown here in a domestic setting - now you see it ...

SECEUROGUARD 1000

- Exceptionally strong security barrier
- Galvanised for corrosion resistance and powder coated
- Fully retractable system
- Excellent through vision when locked
- Multi point locking from a single key Ó
- Smooth running carrier system Custom built for any opening
- Quick and easy to use
- Can be fitted with a locking post at both ends to provide maximum flexibility of operation
- Where access is not required, a fixed sash option is available
- An unlimited width can be accommodated in sections



The bottom track is available folding, to lift clear of the opening, important for unhindered access when used in doorways or french windows



As an optional extra, sashes can hinge away for unobstructed vision







SWS UK is a leading manufacturer of physical security products and has developed the comprehensive Seceuro range of shutters, see-through shutters, retractable gates and removable bars to offer more effective protection for businesses and homes.

Established in 1985 and with a wealth of experience, SWS UK is based in modern, purpose-built premises located near Lancaster and employs more than 200 people.

A cornerstone of SWS's reputation is its national network of specialist distributors. Working in partnership to promote, supply, install and support, distributors provide a trusted, experienced and local source for the SWS product range.

SWS UK is registered to ISO 9002 by the Loss Prevention Certification Board and operates a programme of continuous improvement to its products. The company continues to invest in research and development with the consistent aim of producing physical security products which offer uncompromising protection designed to meet the demands of the modern lifestyle and workplace.







Retail	
Counter & Cabine	at
Domestic	