





# Sectional door SLW 40




Aluminium profile frame structure, bottom section made of steel door panels, optional with wicket door




SLW 40 (exterior view)

Bottom section 625 mm

Normal-fitting **N**

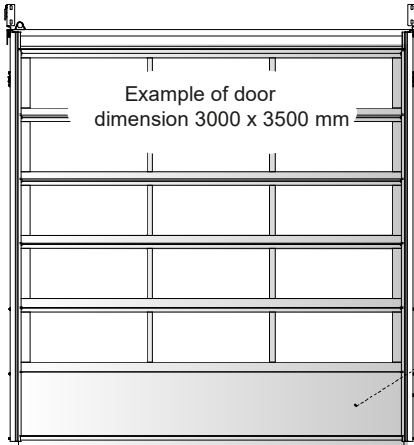

**Optik: ribbed, centre ribbed, unribbed**  
Surface (outside):  
woodgrain | stucco | glatt | micro-profiled

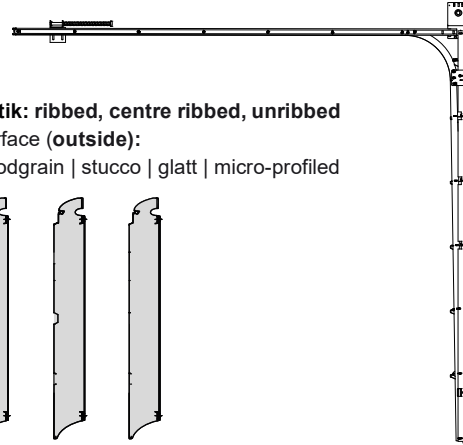


Ribbed version in microprofiled and stucco design surface texture (outside) available. Unribbed version available in microprofiled surface texture.

Special surface texture in smooth or woodgrain available

SLW 40 (exterior view)



Bottom section 1250 mm

Normal-fitting **N**

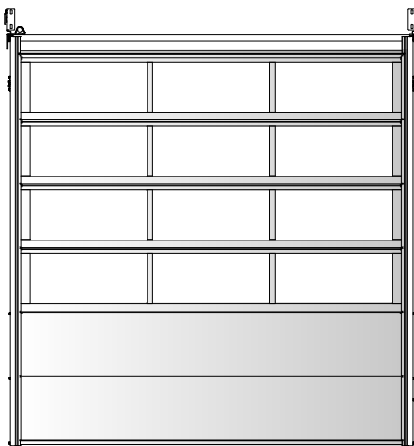


**SL-Sections**  
20 mm synthetic double glazing

**Possible infills:**  
(Perforated sheet, expanded grille, 6 chamber multi-skin sheet, ...)

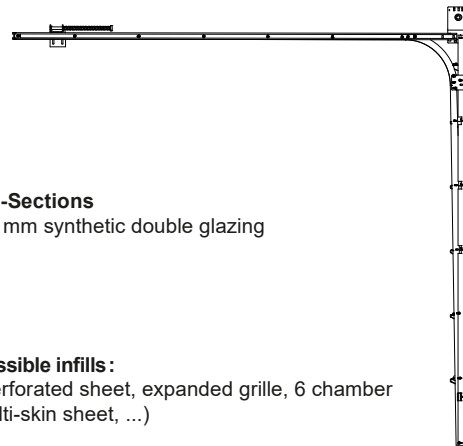


SLW 40 with wicket door (optionally)

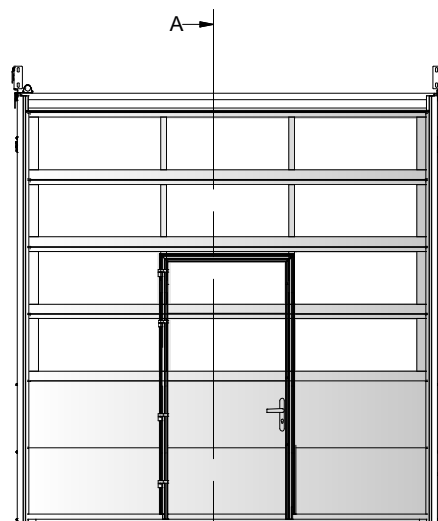

A-A

Threshold types


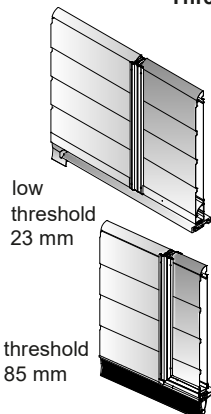


low threshold  
23 mm

threshold  
85 mm

200 mm threshold  
up to a door width  
5000 mm

> door width  
5000 mm

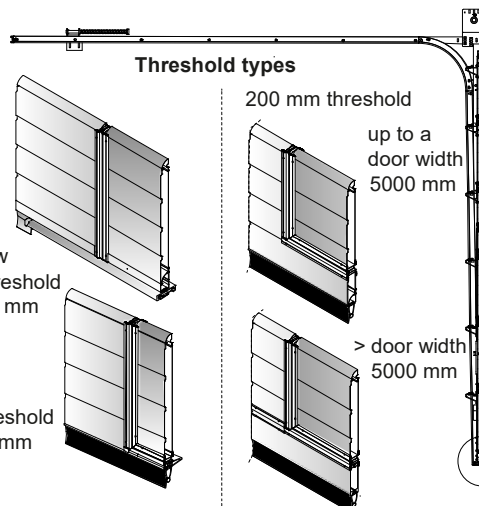

Threshold shapes

Standard equipment for all wicket doors includes:  
Overhead door closer with slide rail, without locking unit,  
mortice lock- prepared for a profil cylinder (PC=30.5/30.5).  
Wicket door opening outwards, frame profiles in aluminium E6/EV1